

**RIWAYAT CORRESPONDENCE
DENGAN EDITOR JURNAL**

Judul Artikel : Sedimentation Rate And The Effect Toward Capacity On Bili-Bili Reservoir, Indonesia
Penulis : Ahmad R. Asrib, Universitas Negeri Makassar
Yasser Abd. Djawad, Universitas Negeri Makassar
Gufran D. Dirawan, Universitas Negeri Makassar
Nama Jurnal : Asian Jr. of Microbiol. Biotech. Env. Sc.
Vol. 18, No. (1) : 2016 : 61-66
Penerbit : Global Science Publications

Timeline Proses Review

Tanggal	Proses Review	Keterangan
7 September 2015	Submit Paper	
10 September 2015	Editor Confirm Paper telah diterima	
15 September 2015	Editor Mengirim Catatan Revisi	
1 Oktober 2015	Author mengirim Revisi	
15 Oktober 2015	Editor mengirim revisi kembali	
27 Oktober 2015	Author mengirim revisi	
3 November 2015	Paper Accepted - LOA	
21 Januari 2016	Paper Published	

From: Ahmad Rifqi Asrib [ahmad_rifqiasrib@yahoo.co.id]

Sent: Monday, September 7, 2015 10:28 AM

To: trivedy@vsnl.com

Subject: Paper Submission AJMBES

Dear Dr. Rakesh Trivedi

I am interested and would like to submit my article in **ASIAN JOURNAL OF MICROBIOLOGY, BIOTECHNOLOGY AND ENVIRONMENTAL SCIENCE** entitled " SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA.

Author: Ahmad Rifqi Asrib, Yasser Abd. Djawad and Gufran Darma Dirawan, Makassar State University, Jl. Bonto Langkasa, 90222, Makassar, South Sulawesi, Makassar, South Sulawesi, Indonesia.

I hope you can accept it thank you very much.

Best Regards

Ahmad Rifqi Asrib



Manuscript AJMBES.doc

3.1MB

SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA

AHMAD RIFQI AOSRIB, YASSER ABD. DJAWAD AND GUFAN DARMA DIRAWAN

Key word : Sediment, Reservoir capacities.

Abstract– Sedimentation is a major problem affecting the sustainable capacity of reservoirs. The Bili-Bili dam is one such reservoir where sedimentation rate control is necessary due to material avalanches from Mount Bawakaraeng upstream reservoirs Jeneberang. This study aimed to investigate the sedimentation rate, sediment inflow, and the duration for sediment flow in order to maintain sustainable capacity. The results indicate that the sediment volume entering the reservoir from 1997 to 2014 was distributed unevenly with the majority (75.7%) occurring at an elevation of 65 to 99.5 m. The dead storage capacity of the reservoir has been filled more than 50%, although sediment control measures still ensure that the sediment that reaches the area is only about 20%. This study provides valuable information for maintaining the sustainable capacity of the Bili-Bili dam reservoir.

INTRODUCTION

The main caused of the reduction in stored capacity of dams in Indonesia is the high rate of sedimentation (Azdan *et al.*, 2008). According to the Center for Research and Development of Water Resources (2008) also mentioned several reservoirs are experiencing high sedimentation rate is Sengguruh and Karangates watershed Kalibrantas Hulu, The reservoir watershed Solo, Reservoir Mrica watershed Serayu, Saguling and Cirata in Citarum Central and Bili-Bili Reservoir Watershed Jeneberang South Sulawesi.

Bili-Bili reservoirs also have experienced land erosion rate of 4.25 tonnes/ha/year. Classification of very severe erosion hazard level occurs on dry land amounted to 33.32 tonnes/ha/year. Zubair (2001) simulated the estimation of sediment in the watershed Jeneberang based tendencies that exist today. Sediment in 2001 amounted to 2000 m³ / km²/ year and increased by 24.2% to 2608 m³/km²/year in

2005, and amounted to 122.8%, or 4678 m³/km²/year in 2010, higher than the rate of Allowable (1500 m³/ km²/year) into the Dead Storage Capacity (DSC) Bili-Bili dam. Environmental Research Center, University of Hasanuddin (2000) mentions that the results of measurements of sediment transport in the river channel Jeneberang ever done over a span of 15 years, ie from 1986 to 2001 showed an increasing trend of sediment by an average of 40 tonnes/ha/year with an average rate of 2.67% per year. From the results of research conducted Fadhiah (2006) turns on the Catchment Rain (DTH)

Increased sedimentation occurred in 2005 with the entry of sediment derived from G. Bawakaraeng avalanche caldera wall is equal to 22,686,654 m³ (Bapro NRM, 2005). Zubair (2001) stated that the source of sediment in reservoirs Bili-Bili derived from soil erosion (71.22%), erosion as a result of landslides and erosion of river banks (28.78%). Potential sediment due to avalanches large enough flowst downstream when high rain intensity so

prone to debris flows with high concentrations. River conditions Jeneberang are still continuous stream sediment during floods and sediment along the river flow to the reservoir Bili-Bili led to increased sedimentation in reservoirs Bili-Bili causing silting of the reservoir, which in turn will reduce the operating life of the dam and threaten the sustainability of the reservoir function. Its also becomes important to be studied considering these reservoirs have a very important role in the context of socio-economic development of society, especially for the city of Makassar and Gowa Regency.

The purposed of this studies was to analyze the rate of sedimentation of rivers and reservoirs upstream Jeneberang Bili-Bili dues to avalanche caldera and analyze the rate of sedfimentation and reservoir capacities of Bili-Bili

RESEARCH METHOD

Research Location

The location of this research is physically located in the DAS system Jeneberang. In this study the limits used are physical limitations have a direct impact on the carrying capacity of the reservoir Bili-Bili, the basin Jeneberang. Administratively the study area Bili-Bili dam is located in Gowa, South Sulawesi Province.

Stages of Research

Research focused on field data collection activities that aim to analyze the sedimentation rate Jeneberang river upstream and reservoir sedimentation rate Bili-Bili.

a. Types and sources of data

The type of data used to analyze avalanches and rate of sedimentation in reservoirs Bili-Bili consist of primary data and secondary data. Primary data collected is the elevation of sedimentation along rivers and reservoirs Jeneberang Bili-Bili obtained based on measurements echosounding in reservoirs, and secondary data from the watershed and reservoir characteristics of Bili-Bili based on the results of the field survey. The secondary data collected is the data infrastructure Bili-Bili dam of NRM Hall and Public Works, climate and weather conditions of the Meteorology and Geophysics Agency.

b. Method of collecting data

Methods of data collection is done by the field

survey to obtain primary data needed to conduct observations of sediment at some point observations representative. Measurements activities directed to take primary data such as elevation of sedimentation in water bodies and reservoirs. Collection of secondary data, conducted at various institutions related to the management of reservoirs and studying literaturee.

c. Data analysis

Calculation of the volume of sediment due to the avalanche caldera done some analysis: descriptive description via digital contour maps and secondary data to determine the state of the characteristics of the reservoir catchment area. furthermore, an analysis along the river upstream reservoirs Jeneberang and Bili-Bili and sedimentation control capacity analysis using building Sabo Dam

RESULTS AND DISCUSSION

The rate of sedimentation in reservoirs Bili-Bili analyzed using measurement data echosounding taken by 22 line cross section (L1-L22) along the reservoir area Bili-Bili. For each transverse depth data taken by boat and echosounding tool. Data collected for each transverse lines on average 50-100 times depending on the mileage and condition of the location. At each point is also made plotting the coordinates to determine the location and position of the point of data collection.

Volume of reservoir sedimentation that every year as measured by the data echosounding further analyzed based on cross-sectional area for each point of the cross section. Volume is calculated based on cross-sectional area to the distance between each point of the cross section. Volume for each year is calculated based on the last elevation data.

Based on the results of data analysis for each cross-section shows that the rate of reservoir sedimentation in 2014 had reached a total of 75,055,327 m³. If seen changes in sedimentation rate before the avalanche caldera which amounted to 8,376,013 m³ (1997-2001) and 14,558,105 m³ (2001-2004) until 2014, shows that the increase is quite high, especially in 2004-2005, namely amounted to 21,743,403 m³. More details are presented in Table 1.

Based on data from 1997 to 2014 showed an increase in sedimentation in reservoirs Bili-Bili. Increased sedimentation was mainly in 2005 has reached elevation above 60 m (at a distance of less

Table 1. Volume Sedimentation per cross-section of the Year 1997-2014

Cross-section	Volume Sedimentation (m ³)							
	1997 - 2001	2001 - 2004	2004 - 2005	2005 - 2006	2006 - 2007	2007 - 2008	2008 - 2013	2013 - 2014
L1 - L2	409.856	763.793	1.891.909	-293.390	258.556	261.401	386.616	3.417.340
L2 - L3	713.636	792.669	1.533.420	341.081	-277.302	319.661	311.805	3.415.309
L3 - L4	368.501	939.762	1.213.782	606.729	-468.159	285.148	458.805	3.119.420
L4 - L5	-83.064	1.155.873	-103.206	344.451	-297.905	203.527	567.300	1.583.448
L5 - L6	510.017	1.213.466	-187.245	225.511	302.773	832.048	780.298	2.844.820
L6 - L7	1.222.885	724.021	146.792	444.095	90.293	439.258	916.748	3.544.834
L7 - L8	410.489	33.860	2.426	294.374	146.836	-98.698	893.100	1.781.086
L8 - L9	-140.736	38.679	770.972	-1.180.029	1.012.080	253.517	2.296.148	2.797.114
L9 - L10	-588.242	91.733	1.525.169	-926.715	887.616	447.761	1.370.925	2.360.486
L10 - L11	-338.013	225.388	2.546.338	-918.752	1.299.883	943.648	819.973	3.634.817
L11 - L12	1.773.260	672.264	2.812.859	-824.250	625.277	1.323.508	626.262	5.685.673
L12 - L13	2.302.718	1.789.475	954.262	1.451.066	-177.507	1.166.898	511.840	6.831.854
L13 - L14	1.308.677	1.817.775	314.865	2.091.326	-870.950	410.868	265.050	4.926.742
L14 - L15	465.101	1.200.576	1.483.342	999.684	-545.585	-242.826	13.870	3.616.988
L15 - L16	-85.844	1.463.717	2.010.121	612.978	567.781	-307.047	137.009	4.705.762
L16 - L17	24.119	520.796	2.305.184	776.520	62.289	356.925	757.904	4.446.812
L17 - L18	321.434	-187.524	2.166.379	589.703	-388.331	852.853	938.192	3.439.853
L18 - 19	106.759	296.976	859.526	481.675	-207.272	634.998	562.324	2.099.988
L19 - 20	-325.541	1.004.805	-439.201	1.435.896	-792.915	416.070	1.205.163	2.088.207
L20 - 21	0	0	-63.966	22.526	-16.769	0	193.609	135.400
L21 - L22	0	0	-326	-2.991	0	0	83.173	79.856
Total	8.376.013	14.558.105	21.743.403	6.571.487	1.210.690	8.499.518	14.096.113	75.055.327

than 1 km from the dam). When compared to 2004 which is still in elevation of 50 m. This show has been an increased sedimentation of about 10 m in just over 1 year. Events avalanche caldera in 2004 is the cause of increased sedimentation, but then the rate of sedimentation in reservoirs Bili-Bili can be controlled by reducing the percentage increase in sedimentation for 2006 through 2014.

Overall results of reservoir sedimentation volume measurement is obtained that the sedimentation rate before the landslide caldera, which is accommodated in the reservoir sedimentation Bili-Bili cumulatively amounted to 8.376 million m³ (April, 2001). After the landslide is the sediment volume in 2014 reached 75.055 million m³. Accumulation of reservoir sedimentation rate is highest when the avalanche caldera after the incident in 2004, but then can be controlled in the next year until 2014.

Volume sedimentation into reservoirs Bili-Bili distributed based on the elevation of the base of the reservoir. Based on the technical data Bili-Bili dam building shows that, for the elevation of 101.6 to 99.5 m is the capacity of the reservoir to function as flood control and to limit the supply of raw water elevation is at 99.5 to 65 m. As for capacity Capacity

Dead (dead storage) at an elevation of 65 m with a maximum of reservoirs is 29 million m³.

Volume of reservoir sedimentation when analyzed by high-elevation surface shows that the majority of sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³ or 75.7% of the total sediment into the reservoir. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir is at an elevation below 65 m. however, if it is seen specifically in dead storage reservoirs, it means that the dead storage capacity has been filled more than 50%. More details can be seen in Table 2. Based elevation data (echosounding) for each point of the cross section (L1-L22) are taken along the reservoir area Bili-Bili and data point coordinates of each point of observation, analysis 3D using statistical software Surfer 8 to get a visualization of surface changes the results of reservoir sedimentation from 1997 to 2014. The analysis showed that in 1997 the surface sedimentary deposit at a depth of less than 65 m (capacity of the dead) is still in a state of normal (Figure 1). However, the differences are very significant visible if seeing the results of the plot to 2014 which saw the sediment surface is getting higher sedimentation (red color changes

Table 2. Percentage of total sedimentation of the reservoir capacity

Reservoir capacity (1000m ³)	Elevation (m)	Sedimentation (1000 m ³)	Total (1000 m ³)	%
Flood Control	41.000	100 - 101.6	1.697	4,2
Raw Water	305.000	99.5 - 100	1.454	75,7
		80 - 90	11.602	
		70 - 80	26.501	
		65 - 70	15.183	
Capacity Dead	29.000	60 - 65	3.549	20,1
		50 - 60	8.279	
		40 - 50	6.395	
			394	
Total	375.000		75.055	100

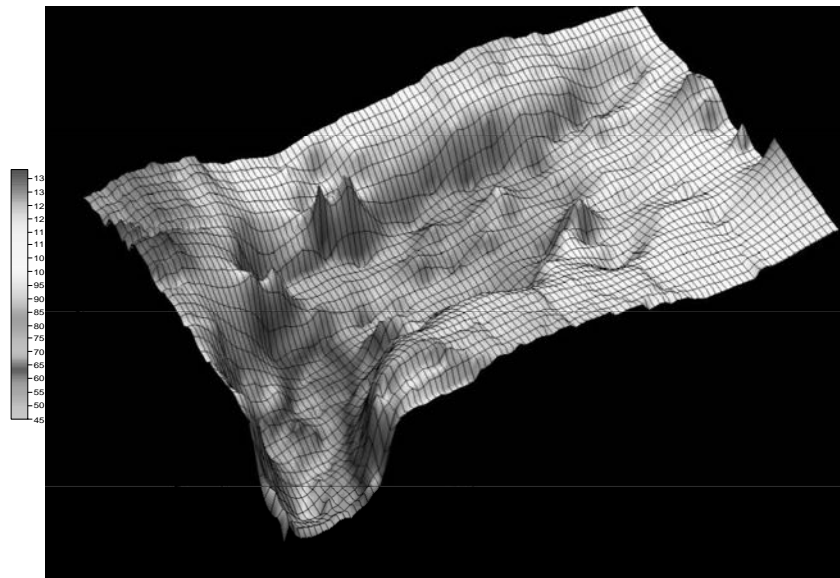


Fig. 1. Visualization of sedimentation in reservoirs Bili-Bili 1997.

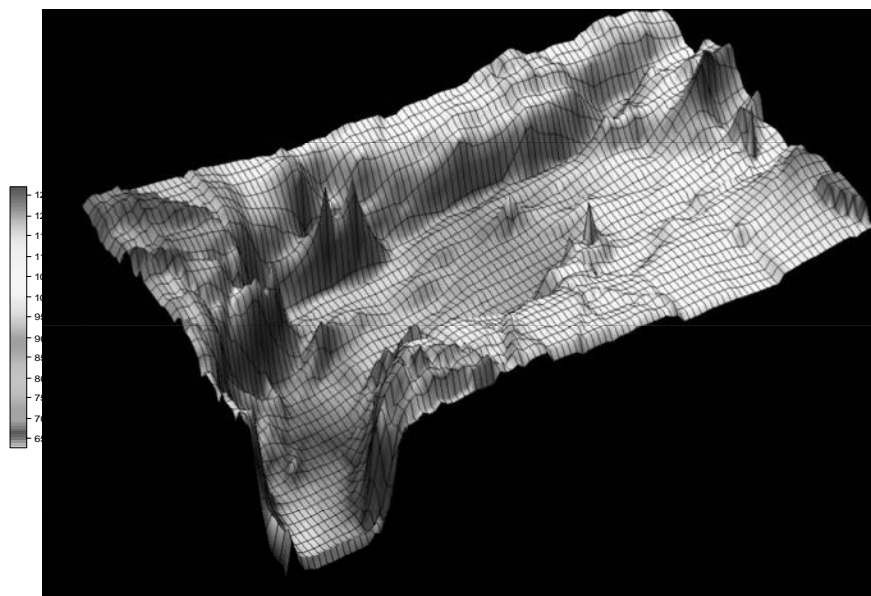


Fig. 2. Visualization of sedimentation in reservoirs Bili-Bili 2014.

increasingly dominant) reaches a maximum elevation to the capacity limit capacity to die (Figure 2). Comparison of the state of the surface change results of reservoir sedimentation that occurred in 1997 and 2014 showed increased levels of sedimentation that can significantly impair the function of the reservoir.

Further, when considering the results of the analysis of the results of reservoir sedimentation

surface changes after the events avalanche caldera in 2004 which turned out to have an impact on the measurement results in 2005. The change appears to have shown a rapid improvement, especially in the area below the elevation of 65 m (capacity of the dead).

From the analysis of three-dimensional visualization also illustrates clearly that changes the surface of the reservoir sedimentation results from

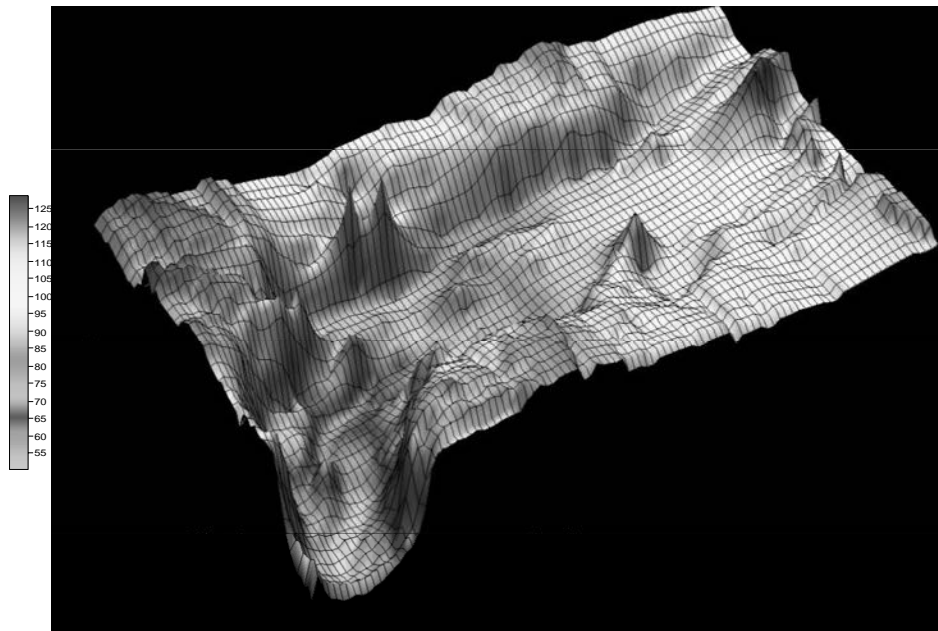


Fig. 3. Visualization of sedimentation in reservoirs Bili-Bili 2004.

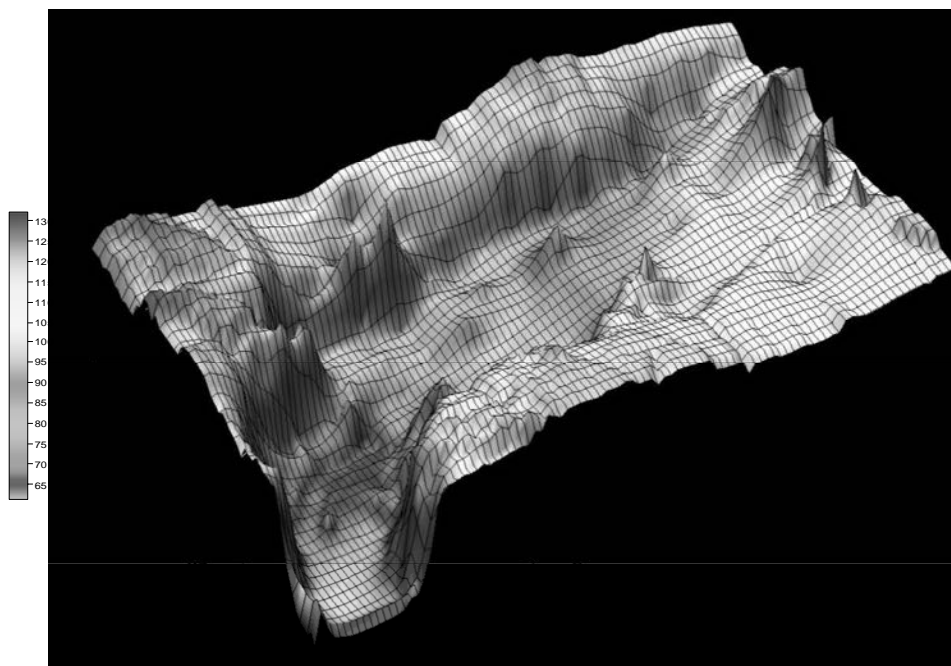


Fig. 4. Visualization of sedimentation in reservoirs Bili-Bili 2005.

1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%.

CONCLUSION

Sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. Dead storage capacity of the reservoir has been filled more than 50%. Furthermore, from the analysis of three-dimensional visualization of the surface it appears that the change of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir is more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if

the sediment that reaches the area is only about 20%.

REFERENCES

- Azdan, M.D. and Candra, R.S. 2008. *Kritisnya Kondisi Bendungan di Indonesia*. Di dalam Seminar Komite Nasional Indonesia untuk Bendungan Besar (KNI-BB). Surabaya. 2-3 Juli 2008.
- Asrib, A.R., Purwanto, Y.J. and Erizal, 2014. *Analysis of Erosion Level Using Map Windows Agricultural Non Point Source Pollution (MWAGNPS) on Jeneberang Sub-Watershed South Sulawesi Province*. International Journal of Science and Engineering. 6(1): 1-5.
- Bapro, PSDA. 2005. *Laporan Hasil Echosounding Waduk Bili-Bili*. Bagian Proyek Pengelolaan Sumber Daya Air Jeneberang. Makassar.
- Fadiah, 2006. *Kajian Pengaruh Erosi Lahan terhadap Sedimentasi di Waduk Bili-Bili Kabupaten Gowa Propinsi Sulawesi Selatan*. [Tesis]. Sekolah Pascasarjana, Universitas Gadjah Mada. Yogyakarta.
- PPLH UNHAS, 2000. *Pengelolaan Terpadu Daerah Aliran Sungai (DAS) Jeneberang Tahap I*. Pusat Penelitian Lingkungan Hidup. Makassar.
- Zubair, H. 2001. *Model Pengendalian Sedimen untuk Mempertahankan Kapasitas Waduk*. Pusat Penelitian Lingkungan Hidup Universitas Hasanuddin. Makassar.

From: Rakesh Trivedi [trivedy@vsnl.com]
Sent: Thursday, September 10, 2015 4:58 PM
To: 'Ahmad Rifqi Asrib' <ahmad_rifqiasrib@yahoo.co.id>
Subject: AJ-F-1334

Dear Mr Ahmad Rifqi Asrib

We have received your paper entitled "SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA. We will proceed it as soon as possible and let you know if we need further information.

Kindest regards

Rakesh Trivedi

From: Rakesh Trivedi [trivedy@vsnl.com]
Sent: Tuesday, September 15, 2015 2:58 PM
To: 'Ahmad Rifqi Asrib' <ahmad_rifqiasrib@yahoo.co.id>
Subject: AJ-F-1334

Dear Mr Ahmad Rifqi Asrib

Your paper has been proceeded and reviewed by our reviewers. Please revise your paper according to the reviewers' comments. We highlight their review as follow: Make sure the abstract is covering the essential information of your article. Please submit your revision before 2nd of October.

Kindest regards

Rakesh Trivedi

To: Rakesh Trivedi <trivedy@vsnl.com>
Date: Tuesday, September 15, 4:58 PM

Dear Rakesh Trivedi

We will revise our paper as soon as possible.

Best regards

Ahmad Rifqi Asrib

From: Ahmad Rifqi Asrib [ahmad_rifqiasrib@yahoo.co.id]

Sent: Thursday, October 1, 2015, 9.50 AM

To: trivedy@vsnl.com

Subject: AJ-F-1334

Dear Dr. Rakesh Trivedi

We have revised our article and follow the reviewers' comment. Please kindly check our paper.

Best regards

Ahmad Rifqi Asrib



Revised Article 3.1MB

SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA

AHMAD RIFQI AOSRIB, YASSER ABD. DJAWAD AND GUFRAH DARMA DIRAWAN

Keyword : Sediment, Reservoir capacities.

Abstract– A decrease in the capacity of a reservoirs due to sediment entering the reservoir exceeds the allowed rate. Therefore it is very necessary research that can provide information on the balance of sediment inflow into the reservoirs and the sediment is allowed that can be used as a reference in maintainingw the capacity of the reservoir sustainable capacity. Sedimentation rate control performed in Bili-Bili dam due to the avalanche of material Mount Bawakaraeng upstream reservoirs Jeneberang in order to function optimally. This study was conducted to obtain data on sedimentation rate, and the rate of sediment entering the reservoir capacity to know how long the sediment flow is not caused debris flow downstream reservoirs. The results showed that the changes in the surface of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%. Then, the volume of reservoir sedimentation is based on high-elevationr surface shows that the majority (75.7%) sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. Deadt stored capacity of the reservoir has been filled more than 50%.

INTRODUCTION

The main caused of the reduction in stored capacity of dams in Indonesia is the high rate of sedimentation (Azdan *et al.*, 2008). According to the Center for Research and Development of Water Resources (2008) also mentioned several reservoirs are experiencings high sedimentation rate is Sengguruh and Karangates watershed Kalibrantas Hulu, The reservoir watershed Solo, Reservoir Mrica watershed Serayu, Saguling and Cirata in Citarum Central and Bili-Bili Reservoir Watershed Jeneberang South Sulawesi.

Bili-Bili reservoirs also have experienced land erosion rate of 4.25 tonnes/ha/year. Classification of very severe erosion hazardr level occurs on dry land amounted to 33.32 tonnes/ha/year. Zubair (2001) simulated the estimation of sediment in the watershed Jeneberang based tendencies that exist today. Sediment in 2001 amounted to 2000 m³ / km²/ year and increased by 24.2% to 2608 m³/km²/year in

2005, and amounted to 122.8%, or 4678 m³/km²/year in 2010, higher than the rate of Allowable (1500 m³/ km²/year) into the Dead Storage Capacity (DSC) Bili-Bili dam. Environmental Research Center, University of Hasanuddin (2000) mentionsf that the results of measurements of sediment transport in the rivered channel Jeneberang ever done over a span of 15 years, ie from 1986 to 2001 showed an increasing trend of sediment by an average of 40 tonnes/ha/year with an average rate of 2.67% per year. From the results of research conducted Fadiyah (2006) turns on the Catchment Rain (DTH)

Increased sedimentation occurred in 2005 with the entry of sediment derived from G. Bawakaraeng avalanche caldera wall is equal to 22,686,654 m³ (Bapro NRM, 2005). Zubair (2001) stated that the source of sediment in reservoirs Bili-Bili derived from soil erosion (71.22%), erosion as a result of landslides and erosion of river banks (28.78%). Potential sediment due to avalanches large enough flowst downstream when high rain intensity so

prone to debris flows with high concentrations. River conditions Jeneberang are still continuous stream sediment during floods and sediment along the river flow to the reservoir Bili-Bili led to increased sedimentation in reservoirs Bili-Bili causing silting of the reservoir, which in turn will reduce the operating life of the dam and threaten the sustainability of the reservoir function. Its also becomes important to be studied considering these reservoirs have a very important role in the context of socio-economic development of society, especially for the city of Makassar and Gowa Regency.

The purposed of this studies was to analyze the rate of sedimentation of rivers and reservoirs upstream JeneberangBili-Bili due to avalanche caldera and analyze the rate of sedimentation and reservoircapacities of Bili-Bili

RESEARCH METHOD

Research Location

The location of this research is physically located in the DAS system Jeneberang. In this study the limits used are physical limitations have a direct impact on the carrying capacity of the reservoir Bili-Bili, the basin Jeneberang. Administratively the study area Bili-Bili dam is located in Gowa, South Sulawesi Province.

Stages of Research

Research focused on field data collection activities that aim to analyze the sedimentation rate Jeneberangriver upstream and reservoir sedimentation rate Bili-Bili.

a. Types and sources of data

The type of data used to analyze avalanches and rate of sedimentation in reservoirs Bili-Bili consist of primary data and secondary data. Primary data collected is the elevation of sedimentation along rivers and reservoirs Jeneberang Bili-Bili obtained based on measurements echosounding in reservoirs, and secondary data from the watershed and reservoir characteristics of Bili-Bili based on the results of the field survey. The secondary data collected is the data infrastructure Bili-Bili dam of NRM Hall and Public Works, climate and weather conditions of the Meteorology and Geophysics Agency.

b. Method of collecting data

Methods of data collection is done by the field

survey to obtain primary data needed to conduct observations of sediment at some point observations representative. Measurements activities directed to take primary data such as elevation of sedimentation in water bodies and reservoirs. Collection of secondary data, conducted at various institutions related to the management of reservoirs and studying literaturee.

c. Data analysis

Calculation of the volume of sediment due to the avalanche caldera done some analysis: descriptive description via digital contour maps and secondary data to determine the state of the characteristics of the reservoir catchment area. furthermore, an analysis along the river upstream reservoirs Jeneberang and Bili-Bili and sedimentation control capacity analysis using building Sabo Dam

RESULTS AND DISCUSSION

The rate of sedimentation in reservoirs Bili-Bili analyzed using measurement data echosounding taken by 22 line cross section (L1-L22) along the reservoir area Bili-Bili. For each transverse depth data taken by boat and echosounding tool. Data collected for each transverse lines on average 50-100 times depending on the mileage and condition of the location. At each point is also made plotting the coordinates to determine the location and position of the point of data collection.

Volume of reservoir sedimentation that every year as measured by the data echosounding further analyzed based on cross-sectional area for each point of the cross section. Volume is calculated based on cross-sectional area to the distance between each point of the cross section. Volume for each year is calculated based on the last elevation data.

Based on the results of data analysis for each cross-section shows that the rate of reservoir sedimentation in 2014 had reached a total of 75,055,327 m³. If seen changes in sedimentation rate before the avalanche caldera which amounted to 8,376,013 m³ (1997-2001) and 14,558,105 m³ (2001-2004) until 2014, shows that the increase is quite high, especially in 2004-2005, namely amounted to 21,743,403 m³. More details are presented in Table 1.

Based on data from 1997 to 2014 showed an increase in sedimentation in reservoirs Bili-Bili. Increased sedimentation was mainly in 2005 has reached elevation above 60 m (at a distance of less

Table 1. Volume Sedimentation per cross-section of the Year 1997-2014

Cross-section	Volume Sedimentation (m ³)							
	1997 - 2001	2001 - 2004	2004 - 2005	2005 - 2006	2006 - 2007	2007 - 2008	2008 - 2013	2013 - 2014
L1 - L2	409.856	763.793	1.891.909	-293.390	258.556	261.401	386.616	3.417.340
L2 - L3	713.636	792.669	1.533.420	341.081	-277.302	319.661	311.805	3.415.309
L3 - L4	368.501	939.762	1.213.782	606.729	-468.159	285.148	458.805	3.119.420
L4 - L5	-83.064	1.155.873	-103.206	344.451	-297.905	203.527	567.300	1.583.448
L5 - L6	510.017	1.213.466	-187.245	225.511	302.773	832.048	780.298	2.844.820
L6 - L7	1.222.885	724.021	146.792	444.095	90.293	439.258	916.748	3.544.834
L7 - L8	410.489	33.860	2.426	294.374	146.836	-98.698	893.100	1.781.086
L8 - L9	-140.736	38.679	770.972	-1.180.029	1.012.080	253.517	2.296.148	2.797.114
L9 - L10	-588.242	91.733	1.525.169	-926.715	887.616	447.761	1.370.925	2.360.486
L10 - L11	-338.013	225.388	2.546.338	-918.752	1.299.883	943.648	819.973	3.634.817
L11 - L12	1.773.260	672.264	2.812.859	-824.250	625.277	1.323.508	626.262	5.685.673
L12 - L13	2.302.718	1.789.475	954.262	1.451.066	-177.507	1.166.898	511.840	6.831.854
L13 - L14	1.308.677	1.817.775	314.865	2.091.326	-870.950	410.868	265.050	4.926.742
L14 - L15	465.101	1.200.576	1.483.342	999.684	-545.585	-242.826	13.870	3.616.988
L15 - L16	-85.844	1.463.717	2.010.121	612.978	567.781	-307.047	137.009	4.705.762
L16 - L17	24.119	520.796	2.305.184	776.520	62.289	356.925	757.904	4.446.812
L17 - L18	321.434	-187.524	2.166.379	589.703	-388.331	852.853	938.192	3.439.853
L18 - 19	106.759	296.976	859.526	481.675	-207.272	634.998	562.324	2.099.988
L19 - 20	-325.541	1.004.805	-439.201	1.435.896	-792.915	416.070	1.205.163	2.088.207
L20 - 21	0	0	-63.966	22.526	-16.769	0	193.609	135.400
L21 - L22	0	0	-326	-2.991	0	0	83.173	79.856
Total	8.376.013	14.558.105	21.743.403	6.571.487	1.210.690	8.499.518	14.096.113	75.055.327

than 1 km from the dam). When compared to 2004 which is still in elevation of 50 m. This show has been an increased sedimentation of about 10 m in just over 1 year. Events avalanche caldera in 2004 is the cause of increased sedimentation, but then the rate of sedimentation in reservoirs Bili-Bili can be controlled by reducing the percentage increase in sedimentation for 2006 through 2014.

Overall results of reservoir sedimentation volume measurement is obtained that the sedimentation rate before the landslide caldera, which is accommodated in the reservoir sedimentation Bili-Bili cumulatively amounted to 8.376 million m³ (April, 2001). After the landslide is the sediment volume in 2014 reached 75.055 million m³. Accumulation of reservoir sedimentation rate is highest when the avalanche caldera after the incident in 2004, but then can be controlled in the next year until 2014.

Volume sedimentation into reservoirs Bili-Bili distributed based on the elevation of the base of the reservoir. Based on the technical data Bili-Bili dam building shows that, for the elevation of 101.6 to 99.5 m is the capacity of the reservoir to function as flood control and to limit the supply of raw water elevation is at 99.5 to 65 m. As for capacity Capacity

Dead (dead storage) at an elevation of 65 m with a maximum of reservoirs is 29 million m³.

Volume of reservoir sedimentation when analyzed by high-elevation surface shows that the majority of sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³ or 75.7% of the total sediment into the reservoir. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir is at an elevation below 65 m. however, if it is seen specifically in dead storage reservoirs, it means that the dead storage capacity has been filled more than 50%. More details can be seen in Table 2. Based elevation data (echosounding) for each point of the cross section (L1-L22) are taken along the reservoir area Bili-Bili and data point coordinates of each point of observation, analysis 3D using statistical software Surfer 8 to get a visualization of surface changes the results of reservoir sedimentation from 1997 to 2014. The analysis showed that in 1997 the surface sedimentary deposit at a depth of less than 65 m (capacity of the dead) is still in a state of normal (Figure 1). However, the differences are very significant visible if seeing the results of the plot to 2014 which saw the sediment surface is getting higher sedimentation (red color changes

Table 2. Percentage of total sedimentation of the reservoir capacity

Reservoir capacity (1000m ³)	Elevation (m)	Sedimentation (1000 m ³)	Total (1000 m ³)	%	
Flood Control	41.000	100 - 101.6	1.697	3.151	4,2
Raw Water	305.000	99.5 - 100	1.454	56.835	75,7
		80 - 90	26.501		
		70 - 80	15.183		
		65 - 70	3.549		
Capacity Dead	29.000	60 - 65	8.279	15.069	20,1
		50 - 60	6.395		
		40 - 50	394		
Total	375.000		75.055	100	

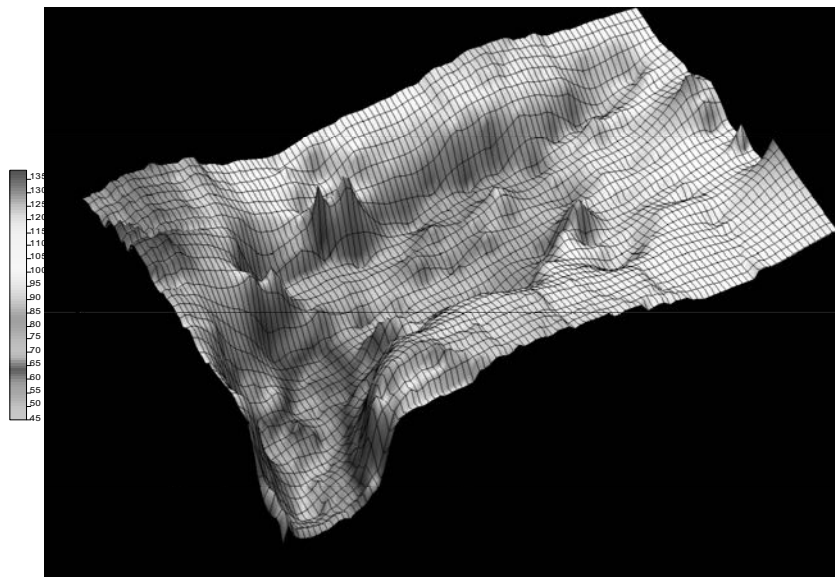


Fig. 1. Visualization of sedimentation in reservoirs Bili-Bili 1997.

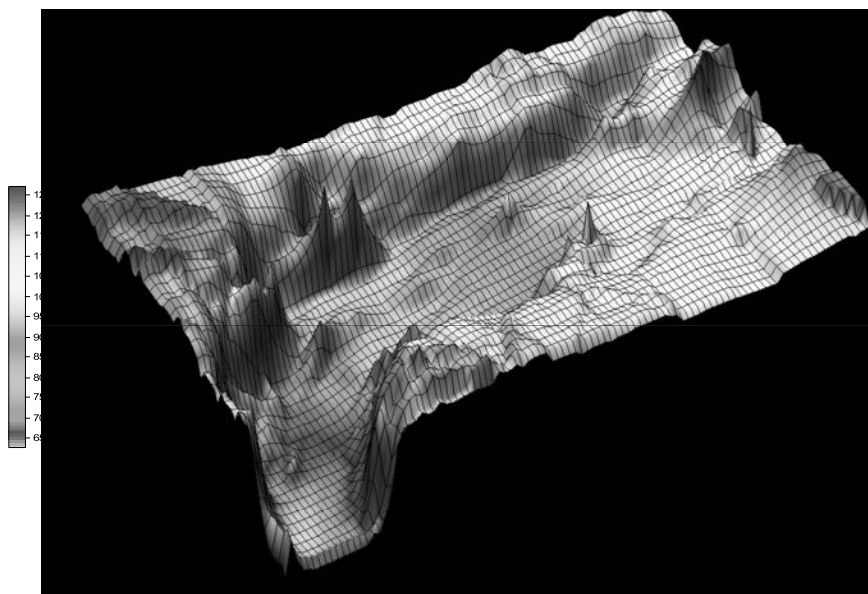


Fig. 2. Visualization of sedimentation in reservoirs Bili-Bili 2014.

increasingly dominant) reaches a maximum elevation to the capacity limit capacity to die (Figure 2). Comparison of the state of the surface change results of reservoir sedimentation that occurred in 1997 and 2014 showed increased levels of sedimentation that can significantly impair the function of the reservoir.

Further, when considering the results of the analysis of the results of reservoir sedimentation

surface changes after the events avalanche caldera in 2004 which turned out to have an impact on the measurement results in 2005. The change appears to have shown a rapid improvement, especially in the area below the elevation of 65 m (capacity of the dead).

From the analysis of three-dimensional visualization also illustrates clearly that changes the surface of the reservoir sedimentation results from

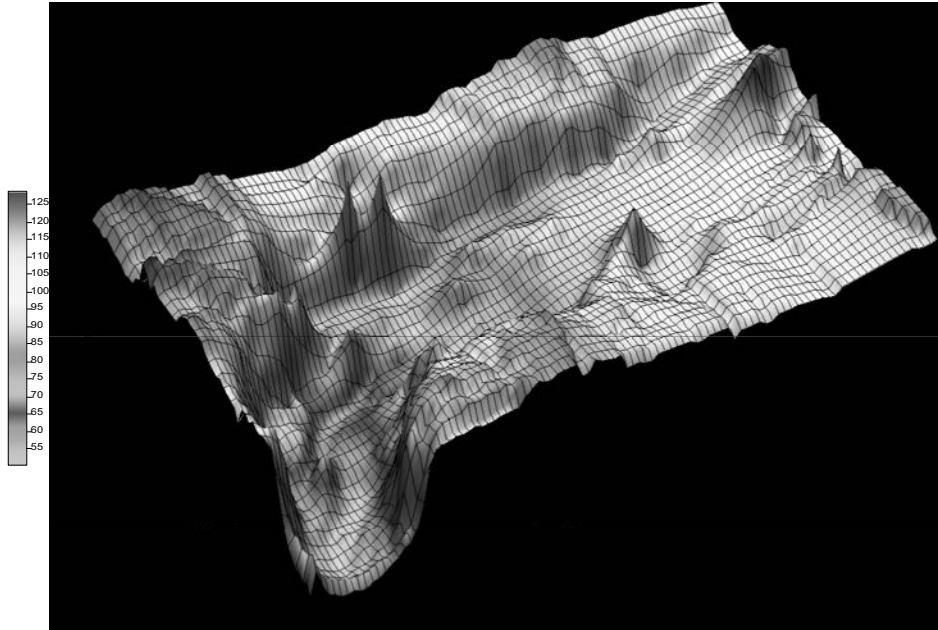


Fig. 3. Visualization of sedimentation in reservoirs Bili-Bili 2004.

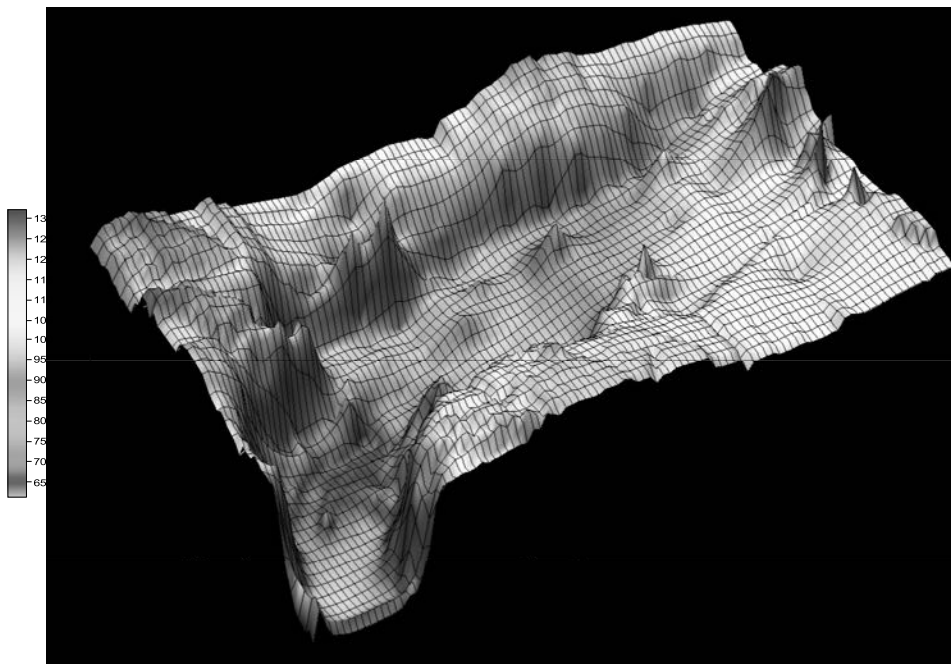


Fig. 4. Visualization of sedimentation in reservoirs Bili-Bili 2005.

1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%.

CONCLUSION

Sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. Dead storage capacity of the reservoir has been filled more than 50%. Furthermore, from the analysis of three-dimensional visualization of the surface it appears that the change of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir is more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if

the sediment that reaches the area is only about 20%.

REFERENCES

- Azdan, M.D. and Candra, R.S. 2008. *Kritisnya Kondisi Bendungan di Indonesia*. Di dalam Seminar Komite Nasional Indonesia untuk Bendungan Besar (KNI-BB). Surabaya. 2-3 Juli 2008.
- Asrib, A.R., Purwanto, Y.J. and Erizal, 2014. *Analysis of Erosion Level Using Map Windows Agricultural Non Point Source Pollution (MWAGNPS) on Jeneberang Sub-Watershed South Sulawesi Province*. International Journal of Science and Engineering. 6(1): 1-5.
- Bapro, PSDA. 2005. *Laporan Hasil Echosounding Waduk Bili-Bili*. Bagian Proyek Pengelolaan Sumber Daya Air Jeneberang. Makassar.
- Fadiah, 2006. *Kajian Pengaruh Erosi Lahan terhadap Sedimentasi di Waduk Bili-Bili Kabupaten Gowa Propinsi Sulawesi Selatan*. [Tesis]. Sekolah Pascasarjana, Universitas Gadjah Mada. Yogyakarta.
- PPLH UNHAS, 2000. *Pengelolaan Terpadu Daerah Aliran Sungai (DAS) Jeneberang Tahap I*. Pusat Penelitian Lingkungan Hidup. Makassar.
- Zubair, H. 2001. *Model Pengendalian Sedimen untuk Mempertahankan Kapasitas Waduk*. Pusat Penelitian Lingkungan Hidup Universitas Hasanuddin. Makassar.

From: Rakesh Trivedi [trivedy@vsnl.com]
Sent: Thursday, October 15, 2015 9:58 AM
To: 'Ahmad Rifqi Asrib' <ahmad_rifqiasrib@yahoo.co.id>
Subject: AJ-F-1334

Dear Mr Ahmad Rifqi Asrib

We have received your revised paper on 1st October and we still need some revision to made. Please revise some minor typo in your paper especially in the introduction.

Please submit your revision before October 28th.

Kindest regards

Rakesh Trivedi

From: Ahmad Rifqi Asrib [ahmad_rifqiasrib@yahoo.co.id]

Sent: Tuesday, October 27, 2015, 09.30 AM

To: trivedy@vsnl.com

Subject: AJ-F-1334

Dear Dr. Rakesh Trivedi

We have sent our article again and revised the abstract as you recommended.

Best regards

Ahmad Rifqi Asrib



Revised Article_2 3.1MB

SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA

AHMAD RIFQI AOSRIB, YASSER ABD. DJAWAD AND GUFRAN DARMA DIRAWAN

Keyword : Sediment, Reservoir capacities.

Abstract– A decrease in the capacity of a ~~reservoirers~~ reservoir due to sediment entering the reservoir exceeds the allowed rate. Therefore it is very necessary research that can provide information on the balance of sediment inflow into the ~~reservoirs~~ reservoir and the sediment is allowed that can be used as a reference in ~~maintainingw~~ maintaining the capacity of the reservoir sustainable capacity. Sedimentation rate control performed in Bili-Bili dam due to the avalanche of material Mount Bawakaraeng upstream reservoirs Jeneberang in order to function optimally. This study was conducted to obtain data on sedimentation rate, and the rate of sediment entering the reservoir capacity to know how long the sediment flow is not caused debris flow downstream reservoirs. The results showed that the changes in the surface of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. ~~Neverthelesse~~ Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%. Then, the volume of reservoir sedimentation is based on ~~high-elevationr~~ high-elevation surface shows that the majority (75.7%) sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. ~~Deadt-storaged~~ Dead storage capacity of the reservoir has been filled more than 50%.

INTRODUCTION

The main ~~caused~~ cause of the reduction in ~~storaged~~ storage capacity of dams in Indonesia is the high rate of sedimentation (Azdan *et al.*, 2008). According to the Center for Research and Development of Water Resources (2008) also mentioned several reservoirs are ~~experiencings~~ experiencing high sedimentation rate is Sengguruh and Karangates watershed Kalibrantas Hulu, The reservoir watershed Solo, Reservoir Mrica watershed Serayu, Saguling and Cirata in Citarum Central and Bili-Bili Reservoir Watershed Jeneberang South Sulawesi.

Bili-Bili reservoirs also have experienced land erosion rate of 4.25 tonnes/ha/year. Classification of very severe erosion ~~hazardr~~ hazard level occurs on dry land amounted to 33.32 tonnes/ha/year. Zubair (2001) simulated the estimation of sediment in the watershed Jeneberang based tendencies that exist today. Sediment in 2001 amounted to 2000 m³/km² / year and increased by 24.2% to 2608 m³/km²/year in

2005, and amounted to 122.8%, or 4678 m³/km²/year in 2010, higher than the rate of Allowable (1500 m³/km²/year) into the Dead Storage Capacity (DSC) Bili-Bili dam. Environmental Research Center, University of Hasanuddin (2000) ~~mentionsf~~ mentions that the results of measurements of sediment transport in the ~~rivered~~ river channel Jeneberang ever done over a span of 15 years, ie from 1986 to 2001 showed an increasing trend of sediment by an average of 40 tonnes/ha/year with an average rate of 2.67% per year. From the results of research conducted Fadiah (2006) turns on the Catchment Rain (DTH)

Increased sedimentation occurred in 2005 with the entry of sediment derived from G. Bawakaraeng avalanche caldera wall is equal to 22,686,654 m³ (Bapro NRM, 2005). Zubair (2001) stated that the source of sediment in reservoirs Bili-Bili derived from soil erosion (71.22%), erosion as a result of landslides and erosion of river banks (28.78%). Potential sediment due to avalanches large enough ~~flowst~~ flows downstream when high rain intensity so

prone to debris flows with high concentrations. River conditions Jeneberang are still continuous stream sediment during floods and sediment along the river flow to the reservoir Bili-Bili led to increased sedimentation in reservoirs Bili-Bili causing ~~siltin~~ silting of the reservoir, which in turn will reduce the operating life of the dam and threaten the sustainability of the reservoir function. ~~It~~ It also becomes important to be studied considering these reservoirs have a very important role in the context of socio-economic development of society, especially for the city of Makassar and Gowa Regency.

The ~~purposed~~ purpose of this ~~studies~~ study was to analyze the rate of sedimentation of rivers and reservoirs upstream Jeneberang Bili-Bili due to avalanche caldera and analyze the rate of sedimentation and reservoir capacities of Bili-Bili

RESEARCH METHOD

Research Location

The location of this research is physically located in the DAS system Jeneberang. In this study the limits used are physical limitations have a direct impact on the carrying capacity of the reservoir Bili-Bili, the basin Jeneberang. Administratively the study area Bili-Bili dam is located in Gowa, South Sulawesi Province.

Stages of Research

Research focused on field data collection activities that aim to analyze the sedimentation rate Jeneberang river upstream and reservoir sedimentation rate Bili-Bili.

a. Types and sources of data

The type of data used to analyze avalanches and rate of sedimentation in reservoirs Bili-Bili consist of primary data and secondary data. Primary data collected is the elevation of sedimentation along rivers and reservoirs Jeneberang Bili-Bili obtained based on measurements echosounding in reservoirs, and secondary data from the watershed and reservoir characteristics of Bili-Bili based on the results of the field survey. The secondary data collected is the data infrastructure Bili-Bili dam of NRM Hall and Public Works, climate and weather conditions of the Meteorology and Geophysics Agency.

b. Method of collecting data

Methods of data collection is done by the field

survey to obtain primary data needed to conduct observations of sediment at some point observations representative. **Measurements** Measurement activities directed to take primary data such as elevation of sedimentation in water bodies and reservoirs. Collection of secondary data, conducted at various institutions related to the management of reservoirs and studying ~~literaturee~~ literature.

Data analysis

Calculation of the volume of sediment due to the avalanche caldera done some analysis: descriptive description via digital contour maps and secondary data to determine the state of the characteristics of the reservoir catchment area. furthermore, an analysis along the river upstream reservoirs Jeneberang and Bili-Bili and sedimentation control capacity analysis using building Sabo Dam

RESULTS AND DISCUSSION

The rate of sedimentation in reservoirs Bili-Bili analyzed using measurement data echosounding taken by 22 line cross section (L1-L22) along the reservoir area Bili-Bili. For each transverse depth data taken by boat and echosounding tool. Data collected for each transverse lines on average 50-100 times depending on the mileage and condition of the location. At each point is also made plotting the coordinates to determine the location and position of the point of data collection.

Volume of reservoir sedimentation that every year as measured by the data echosounding further analyzed based on cross-sectional area for each point of the cross section. Volume is calculated based on cross-sectional area to the distance between each point of the cross section. Volume for each year is calculated based on the last elevation data.

Based on the results of data analysis for each cross-section shows that the rate of reservoir sedimentation in 2014 had reached a total of 75,055,327 m³. If seen changes in sedimentation rate before the avalanche caldera which amounted to 8,376,013 m³ (1997-2001) and 14,558,105 m³ (2001-2004) until 2014, shows that the increase is quite high, especially in 2004-2005, namely amounted to 21,743,403 m³. More details are presented in Table 1.

Based on data from 1997 to 2014 showed an increase in sedimentation in reservoirs Bili-Bili. Increased sedimentation was mainly in 2005 has reached elevation above 60 m (at a distance of less

Table 1. Volume Sedimentation per cross-section of the Year 1997-2014

Cross-section	Volume Sedimentation (m ³)							
	1997 - 2001	2001 - 2004	2004 - 2005	2005 - 2006	2006 - 2007	2007 - 2008	2008 - 2013	2013 - 2014
L1 - L2	409.856	763.793	1.891.909	-293.390	258.556	261.401	386.616	3.417.340
L2 - L3	713.636	792.669	1.533.420	341.081	-277.302	319.661	311.805	3.415.309
L3 - L4	368.501	939.762	1.213.782	606.729	-468.159	285.148	458.805	3.119.420
L4 - L5	-83.064	1.155.873	-103.206	344.451	-297.905	203.527	567.300	1.583.448
L5 - L6	510.017	1.213.466	-187.245	225.511	302.773	832.048	780.298	2.844.820
L6 - L7	1.222.885	724.021	146.792	444.095	90.293	439.258	916.748	3.544.834
L7 - L8	410.489	33.860	2.426	294.374	146.836	-98.698	893.100	1.781.086
L8 - L9	-140.736	38.679	770.972	-1.180.029	1.012.080	253.517	2.296.148	2.797.114
L9 - L10	-588.242	91.733	1.525.169	-926.715	887.616	447.761	1.370.925	2.360.486
L10 - L11	-338.013	225.388	2.546.338	-918.752	1.299.883	943.648	819.973	3.634.817
L11 - L12	1.773.260	672.264	2.812.859	-824.250	625.277	1.323.508	626.262	5.685.673
L12 - L13	2.302.718	1.789.475	954.262	1.451.066	-177.507	1.166.898	511.840	6.831.854
L13 - L14	1.308.677	1.817.775	314.865	2.091.326	-870.950	410.868	265.050	4.926.742
L14 - L15	465.101	1.200.576	1.483.342	999.684	-545.585	-242.826	13.870	3.616.988
L15 - L16	-85.844	1.463.717	2.010.121	612.978	567.781	-307.047	137.009	4.705.762
L16 - L17	24.119	520.796	2.305.184	776.520	62.289	356.925	757.904	4.446.812
L17 - L18	321.434	-187.524	2.166.379	589.703	-388.331	852.853	938.192	3.439.853
L18 - 19	106.759	296.976	859.526	481.675	-207.272	634.998	562.324	2.099.988
L19 - 20	-325.541	1.004.805	-439.201	1.435.896	-792.915	416.070	1.205.163	2.088.207
L20 - 21	0	0	-63.966	22.526	-16.769	0	193.609	135.400
L21 - L22	0	0	-326	-2.991	0	0	83.173	79.856
Total	8.376.013	14.558.105	21.743.403	6.571.487	1.210.690	8.499.518	14.096.113	75.055.327

than 1 km from the dam). When compared to 2004 which is still in elevation of 50 m. This show has been an increased sedimentation of about 10 m in just over 1 year. Events avalanche caldera in 2004 is the cause of increased sedimentation, but then the rate of sedimentation in reservoirs Bili-Bili can be controlled by reducing the percentage increase in sedimentation for 2006 through 2014.

Overall results of reservoir sedimentation volume measurement is obtained that the sedimentation rate before the landslide caldera, which is accommodated in the reservoir sedimentation Bili-Bili cumulatively amounted to 8.376 million m³ (April, 2001). After the landslide is the sediment volume in 2014 reached 75.055 million m³. Accumulation of reservoir sedimentation rate is highest when the avalanche caldera after the incident in 2004, but then can be controlled in the next year until 2014.

Volume sedimentation into reservoirs Bili-Bili distributed based on the elevation of the base of the reservoir. Based on the technical data Bili-Bili dam building shows that, for the elevation of 101.6 to 99.5 m is the capacity of the reservoir to function as flood control and to limit the supply of raw water elevation is at 99.5 to 65 m. As for capacity Capacity

Dead (dead storage) at an elevation of 65 m with a maximum of reservoirs is 29 million m³.

Volume of reservoir sedimentation when analyzed by high-elevation surface shows that the majority of sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³ or 75.7% of the total sediment into the reservoir. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir is at an elevation below 65 m. however, if it is seen specifically in dead storage reservoirs, it means that the dead storage capacity has been filled more than 50%. More details can be seen in Table 2. Based elevation data (echosounding) for each point of the cross section (L1-L22) are taken along the reservoir area Bili-Bili and data point coordinates of each point of observation, analysis 3D using statistical software Surfer 8 to get a visualization of surface changes the results of reservoir sedimentation from 1997 to 2014. The analysis showed that in 1997 the surface sedimentary deposit at a depth of less than 65 m (capacity of the dead) is still in a state of normal (Figure 1). However, the differences are very significant visible if seeing the results of the plot to 2014 which saw the sediment surface is getting higher sedimentation (red color changes

Table 2. Percentage of total sedimentation of the reservoir capacity

Reservoir capacity (1000m ³)	Elevation (m)	Sedimentation (1000 m ³)	Total (1000 m ³)	%	
Flood Control	41.000	100 - 101.6	1.697	3.151	4,2
Raw Water	305.000	99.5 - 100	1.454	56.835	75,7
		80 - 90	26.501		
		70 - 80	15.183		
		65 - 70	3.549		
Capacity Dead	29.000	60 - 65	8.279	15.069	20,1
		50 - 60	6.395		
		40 - 50	394		
Total	375.000		75.055	100	

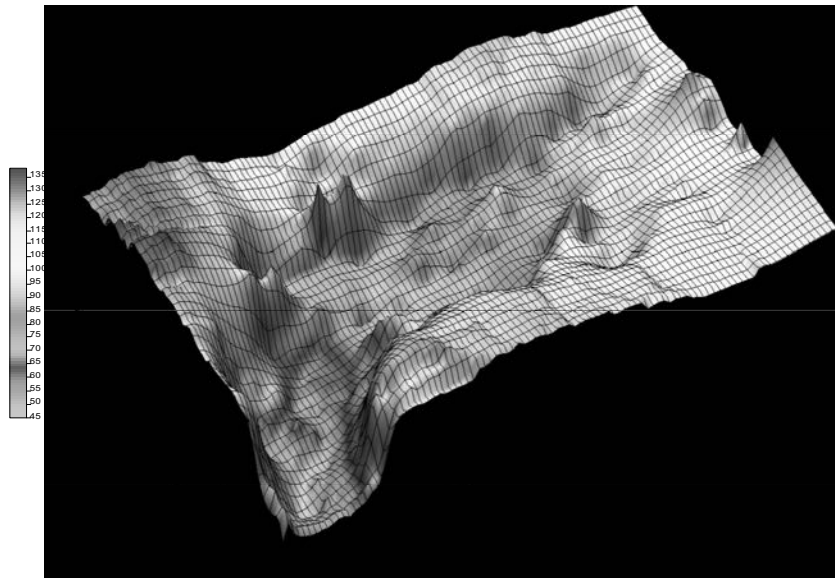


Fig. 1. Visualization of sedimentation in reservoirs Bili-Bili 1997.

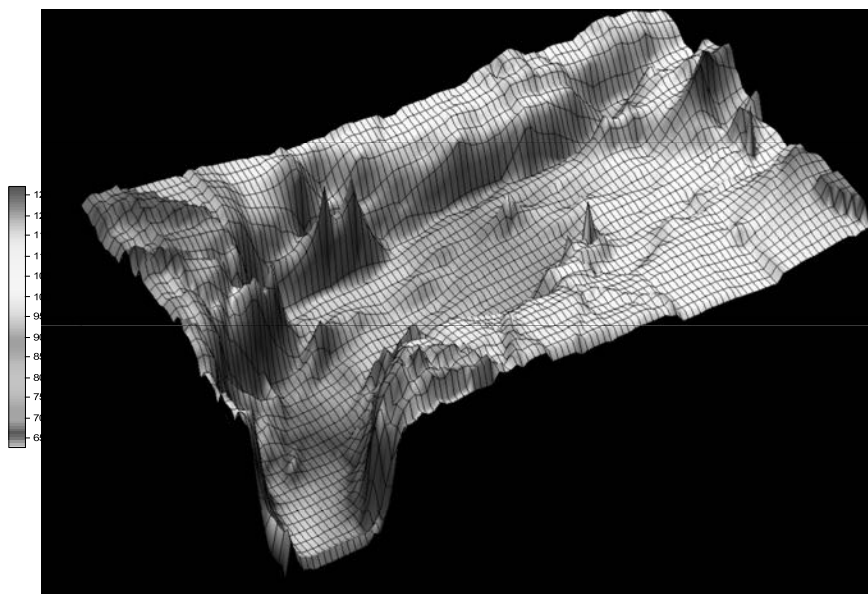


Fig. 2. Visualization of sedimentation in reservoirs Bili-Bili 2014.

increasingly dominant) reaches a maximum elevation to the capacity limit capacity to die (Figure 2). Comparison of the state of the surface change results of reservoir sedimentation that occurred in 1997 and 2014 showed increased levels of sedimentation that can significantly impair the function of the reservoir.

Further, when considering the results of the analysis of the results of reservoir sedimentation

surface changes after the events avalanche caldera in 2004 which turned out to have an impact on the measurement results in 2005. The change appears to have shown a rapid improvement, especially in the area below the elevation of 65 m (capacity of the dead).

From the analysis of three-dimensional visualization also illustrates clearly that changes the surface of the reservoir sedimentation results from

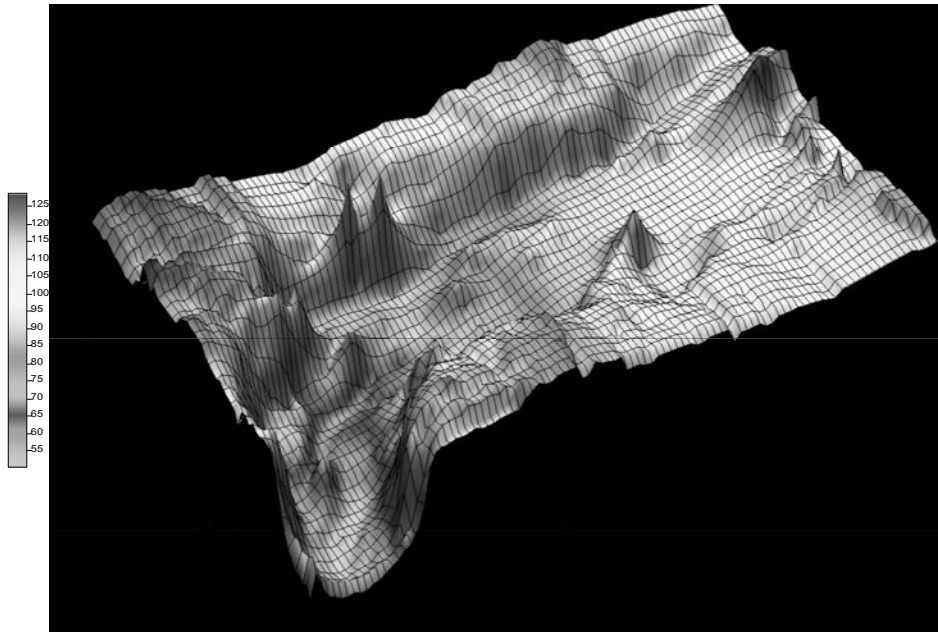


Fig. 3. Visualization of sedimentation in reservoirs Bili-Bili 2004.

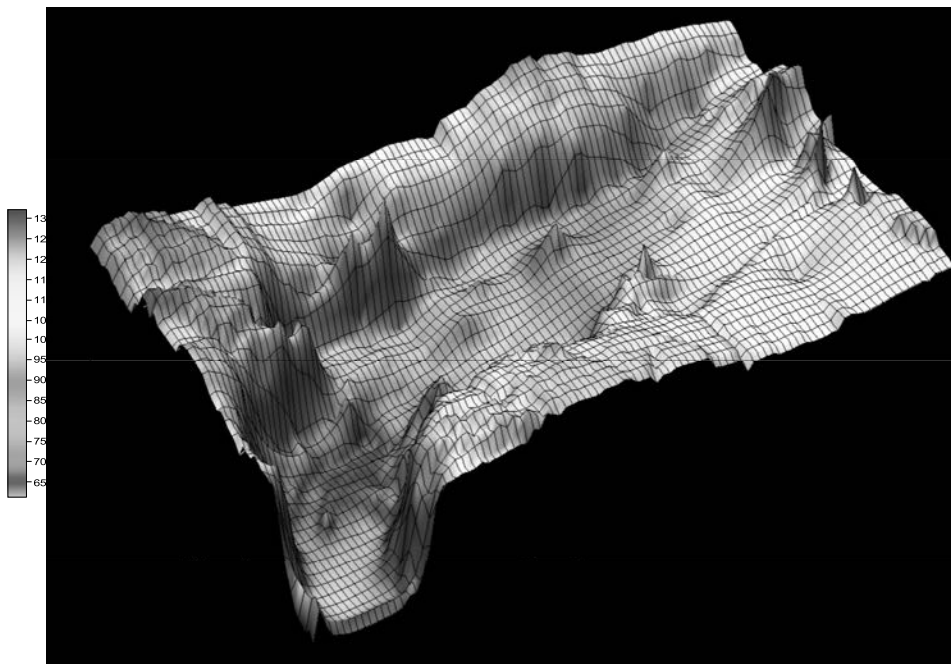


Fig. 4. Visualization of sedimentation in reservoirs Bili-Bili 2005.

1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%.

CONCLUSION

Sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. Dead storage capacity of the reservoir has been filled more than 50%. Furthermore, from the analysis of three-dimensional visualization of the surface it appears that the change of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir is more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if

the sediment that reaches the area is only about 20%.

REFERENCES

- Azdan, M.D. and Candra, R.S. 2008. *Kritisnya Kondisi Bendungan di Indonesia*. Di dalam Seminar Komite Nasional Indonesia untuk Bendungan Besar (KNI-BB). Surabaya. 2-3 Juli 2008.
- Asrib, A.R., Purwanto, Y.J. and Erizal, 2014. *Analysis of Erosion Level Using Map Windows Agricultural Non Point Source Pollution (MWAGNPS) on Jeneberang Sub-Watershed South Sulawesi Province*. International Journal of Science and Engineering. 6(1): 1-5.
- Bapro, PSDA. 2005. *Laporan Hasil Echosounding Waduk Bili-Bili*. Bagian Proyek Pengelolaan Sumber Daya Air Jeneberang. Makassar.
- Fadiah, 2006. *Kajian Pengaruh Erosi Lahan terhadap Sedimentasi di Waduk Bili-Bili Kabupaten Gowa Propinsi Sulawesi Selatan*. [Tesis]. Sekolah Pascasarjana, Universitas Gadjah Mada. Yogyakarta.
- PPLH UNHAS, 2000. *Pengelolaan Terpadu Daerah Aliran Sungai (DAS) Jeneberang Tahap I*. Pusat Penelitian Lingkungan Hidup. Makassar.
- Zubair, H. 2001. *Model Pengendalian Sedimen untuk Mempertahankan Kapasitas Waduk*. Pusat Penelitian Lingkungan Hidup Universitas Hasanuddin. Makassar.

From: Rakesh Trivedi [trivedy@vsnl.com]
Sent: Tuesday, November 17, 2015 10:58 AM
To: 'Ahmad Rifqi Asrib' <ahmad_rifqiasrib@yahoo.co.id>
Subject: AJ-F-1334

Dear Mr Ahmad Rifqi Asrib

We have come to decision that your paper is accepted for publication. Please kindly find the attachment letter of Acceptance and your paper will be published in Vol. 18, No. (1): 2016.

Kindest regards

Rakesh Trivedi



LOA 403.6kB


To: Rakesh Trivedi <ahmad_rifqiasrib@yahoo.co.id>
Date: Tuesday, November 17, 2015, 1:58 PM

Dear Rakesh Trivedi

Thank you so much for your kind consideration. We authors thank your help and support.

Best regards

Ahmad Rifqi Asrib



EM INTERNATIONAL

C-101, Prakriti, Balewadi, Baner,
Pune 411 045, Maharashtra, India

☎ 91-20-46745119, 9326712297

Email: rktem@pn3.vsnl.net.in;

Website: envirobiotechjournals.com

INTERNATIONAL JOURNALS

POLLUTION RESEARCH	Quarterly	ISSN 0257 - 8050
JR.OF INDUSTRIAL POLLUTION CONTROL	Biannual	ISSN 0970 - 2083
ECOLOGY, ENVIRONMENT AND CONSERVATION	Quarterly ISSN	0971 - 765 X
ASIAN JOURNAL OF MICROBIOLOGY BIOTECHNOLOGY & ENVIRONMENTAL SCIENCE	(Quarterly)	ISSN # 0972 - 3005

Ahmad Rifqi Asrib, Yasser Abd. Djawad and
Gufran Darma Dirawan
Makassar State University,
Jl. Bonto Langkasa,90222, Makassar,
South Sulawesi, Makassar,
South Sulawesi, Indonesia

Date : 17.11.2015
Ref. : AJ-F-1334

Dear Authors,

The editors are pleased to inform you that your mss entitled-

- **Sedimentation Rate and the Effect Toward Capacity on Bili-Bili Reservoir**

is accepted for publication in the International Journal- **ASIAN JOURNAL OF MICROBIOLOGY, BIOTECHNOLOGY AND ENVIRONMENTAL SCIENCE**, shall appear in **2016 (1)** issue of the journal.

Kindly note **ASIAN JOURNAL OF MICROBIOLOGY, BIOTECHNOLOGY AND ENVIRONMENTAL SCIENCE** has NAAS, India impact factor 3.07. It has SCOPUS h index 11 (www.envirobiotechjournals.com).

Thanking you & with regards

Yours Sincerely

Publisher

From: Rakesh Trivedi [trivedy@vsnl.com]
Sent: Thursday, January 21, 2016 10:00 AM
To: 'Ahmad Rifqi Asrib' <ahmad_rifqiasrib@yahoo.co.id>
Subject: AJ-F-1334

Dear Mr Ahmad Rifqi Asrib

The editors are pleased to inform you that ASIAN MICROBIOLOGY, BIOTECHNOLOGY AND ENVIRONMENTAL appear Volume 18 No (1) 2016 has been issued. Please check that attachment below.

Kindest regards

Rakesh Trivedi



AJ-9 1.4MB



AJ-Content 64kB

**ASIAN JOURNAL OF MICROBIOLOGY, BIOTECHNOLOGY AND
ENVIRONMENTAL SCIENCES
(VOL. 18, NO. 1, 2016)**

CONTENTS

- 1-8 ISOLATION AND CHARACTERIZATION OF CHITINOLYTIC *PAENIBACILLUS* SP. D10-2 FROM TROPICAL SHRIMP POND WASTE WATER
—AMRIH PRASETYO, LIES MIRA YUSIATI, RUSMAN, NANUNG AGUS FITRIYANTO, TOMOYUKI NAKAGAWA, TAKASHI HAYAKAWA AND YUNY ERWANTO
- 9–17 MISMATCH IDENTIFICATION OF LANDUSE PLANNING AND FORMULATION OF LANDUSE PATTERN BASED ON TIDAL SWAMP AGROECOSYSTEM
—ALI IMRON BAMIN, HASBI, KIKI YULIATI AND MUHAMMAD YAZID
- 19–23 SEED TREATMENT OF CHILLI SEEDS INFECTED WITH *COLLETOTRICHUM CAPSICI* CAUSING ANTHRACNOSE DISEASE BY ANTAGONISTIC *STREPTOMYCES*-PR22
—R. YUTTHASIN, P. THUMMABENJAPONE AND A. HIRANSALAE
- 25–30 OPTIMIZATION OF CYCLE SEQUENCING DNA BASE WITH REAGENTS BIGDYE PGEM USING DNA SEQUENCER GENETIC ANALYSIS AUTOMATIS ABI PIRSM 310
—HARUMI YUNIARTI, BAMBANG CHOLIS S AND ASTRI RINANTI NUGROHO
- 31–34 ISOLATION AND SCREENING OF ANTIMICROBIAL-PRODUCING ACTINOMYCETES FROM MARINE SEDIMENT OF GALESONG COAST, INDONESIA
—RAHMITA BURHAMZAH, M. NATSIR DJIDE, HERLINA RANTE AND ELMI N. ZAINUDDIN
- 35–45 INVESTIGATION OF FECAL CONTAMINATION OF GROUNDWATER AND SURFACE WATER AT AL WASIT NATURE RESERVE, SHARJAH, UNITED ARAB EMIRATES
—FATIN SAMARA, TARIG A. ALI, JENNY HAVERILA AND SANDRA KNUTESON
- 47–53 INCIDENCE OF ENDOPHYTIC FUNGI AND OCCURRENCE OF *Beauveria* AND *Paecilomyces* IN MAIZE (*Zea mays* L.) UNDER FIELD AND GREENHOUSE CONDITIONS
—PIMENTEL, IDA CHAPAVAL, GABARDO, JUAREZ, POITEVIN, CAROLINA GRACIA, STUART, ANDRESSA KATISKI DA COSTA, DE AZEVEDO AND JOÃO LÚCIO
- 55–59 COAL COMBUSTION FROM POWER PLANT INDUSTRY IN MISAMIS ORIENTAL, PHILIPPINES: A POTENTIAL GROUNDWATER CONTAMINATION AND HEAVY METAL DETECTION
—OLIVA P. CANENCIA AND ANGELO MARK P. WALAG
- 61–66 SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA
—AHMAD RIFIQI AOSRIB, YASSER ABD. DJAWAD AND GUFRAN DARMA DIRAWAN
- 67–73 ASSESSMENT OF LEPTIN HORMONE AND VITAMIN C IN PATIENTS WITH TYPE 2 DIABETES MELLITUS IN NAJAF GOVERNORATE, IRAQ
—ARSHAD NOORI GHANI AL-DUJAILI, HYDAR MUHSIN KHALFA HUSSAIN AND NOOR ALHUDA GHANEM HADI AL-FATLAWI
- 75–77 DEGRADATION OF 4-METHYLPYRIDINE BY *ARTHROBACTER* SP.
—F.M. KHASAEVA, I.A. PARSHIKOV AND E.I. ZARAISKY
- 79–91 LEACHATE CHARACTERISTIC AND TREATMENT EFFICIENCY AT KHANH SON LANDFILL, VIETNAM
—HOANG T.N. DAO, TSUYOSHI DANSHITA, MASASHI HATAMOTO AND TAKASHI YAMAGUCHI
- 93–99 ENGINEERING PROLIFERATION AND TEXTURE DURING FRUIT CHIPS VACUUM FRYING
—JAMALUDDIN, BUDI RAHARDJO, PUJJI HASTUTI DAN ROCHMADI AND GUFRAN DARMA DIRAWAN
- 101–106 LIPID CONTENT FROM MONOCULTURE OF MICROALGAE *CHLORELLA ZOFINGIENSIS* DÖNZ AND MIXED CULTURE OF GLAGAH ISOLATE IN LABORATORY SCALE AND RACEWAY POND FOR BIODIESEL PRODUCTION
—EKO AGUS SUYONO, MATIN NUHAMUNADA, NASTITI RAMADHANI AND RAMDHANIYAH
- 107–110 EVALUATION LEVELS OF IMMUNOGLOBIN G AND LIPID PROFILE IN PATIENTS INFECTED WITH HYATID CYST IN AL-NAJAF GOVERNATE, IRAQ
—K.A. SALEEM, ALHADRAWY, K.A. MAYSOON, ALHADRAWRY, ALI HASSAN ABOOD AND HYDAR MUHSIN KHALFAH HUSSAIN
- 111–116 MOLECULAR IDENTIFICATION OF *ESCHERICHIA COLI* BETA -LACTAMASE *TEM* AND *SHVBY* PCR IN TEHRAN HOSPITAL WASTE WATER
—TAHEREH NESHATI, FATEMEH NOORBAKHSH AND SHOHREHZARE KARIZI
- 117–124 ASSESSMENT OF THE CC AND CXC CHEMOKINE FAMILY'S AMOUNTS IN BRONCHOALVEOLAR FLUID AND PERIPHERAL BLOOD SAMPLES FROM PATIENTS WITH PULMONARY TUBERCULOSIS IN MASHHAD PERSIAN DATE 2013 TO 2014 IN COMPARISON TO HEALTHY PEOPLE
—ZIBA SHABANI, HAMID ABOUSAEEDI, GHOLAM HOSSIEH HASAN SHAHI, AMIN SEYFADDINY AND AMIR REZA AGHEBAT KHAYR
- 125–131 EFFECT OF HOT AQUEOUS AND ETHANOL EXTRACTS OF CITRUS LIMON (L.) BURM SEEDS ON SOME HORMONAL LEVELS AND FERTILITY OF FEMALE ALBINO RATS
—ARSHAD NOORI GHANI AL-DUJAILI, KHAMA'AL HUSSEIN ABOOD AL-KHAFAJI AND AHMAD ABEIS MOTAR AL-SULTANEH
- 133–138 COMMUNITY PERCEPTION OF RURAL ROAD NETWORK IN TANJUNG LAGO DISTRICT OF BANYUASIN SOUTH SUMATRA
—FIRMASNYAH, M. EDI ARMANTO, ROBIYANTO H. SUSANTO, JONI ARLIASNYAH AND MUHAMMAD YAZID

(Continued on Inside Back Cover)

**ASIAN JOURNAL OF MICROBIOLOGY, BIOTECHNOLOGY AND
ENVIRONMENTAL SCIENCES
(VOL. 18, NO. 1, 2016)**

CONTENTS

(Contents Continued from Back Cover)

- 139–143 PALEOCLIMATE OF TABRIZ SEDIMENTS BASED ON PALEO FLORA NORTHWEST OF IRAN
—ALI ASGHAR SIAB GHODSI
- 145–151 ASSESSMENT OF SERUM LEVEL OF STROMAL DERIVED FACTOR – 1A (SDF – 1A) IN SERUM OF PATIENTS WITH SEPSIS AT ADMISSION AND DISCHARGE IN ALI – EBNE – ABITALEB HOSPITAL, RAFSANJAN AT 2014
—ZIBA SHABANI, HAMID ABOUSAEEDI, GHOLAMHOSSIEH HASAN SHAHI AND MOHAMMAD KAMALI
- 153–156 THE GROWTH PATTERN AND OIL ACCUMULATION IN FRUIT TISSUES OF OLIVE CULTIVAR KRONEIKI
—AKRAM SALMANI, ESMAEIL SEIFI, MAHDI ALIZADEH, AMAN MOHAMMAD ZIAIIFAR AND HOSSEIN FERAYDOONI
- 157–165 MICROBIOLOGY AS A TOOL FOR RESEARCH AND DEVELOPMENT-AN OVERVIEW
—P. K. MAHESHWAR AND H. S. JAYANTH
- 167–174 ISOLATION AND CHARACTERIZATION OF BACTERIOPHAGE FROM WASTE WATER AGAINST *E. COLI*, A FOOD BORNE PATHOGEN
—VIPIN SINGH, PRANAY JAIN AND SWATI DAHIYA
- 175–183 BIOCHEMICAL, MICROBIAL AND SENSORY PROPERTIES OF MACKEREL (*RASTRILLIGER KANGURTA*) DRIED IN SOLAR-BIOMASS HYBRID TUNNEL DRYER
—B. R. CHAVAN, A. YAKUPITIYAGE, S. KUMAR AND V. B. SUTAR
- 185–188 KARYOTYPIC ANALYSIS OF *DEVARIO AEQUIPINNATUS* (MCCLELLAND, 1839) FROM GADANA RIVER SOUTH INDIA WITH NOR BANDING AND C-BANDING
—N. SHANTHIPREYA, M. ARUNACHALAM, N. SUKUMARAN, P. SIVAKUMAR AND B. ESAKKIAMMAL
- 189–194 PRODUCTION OF AN EXTRACELLULAR PROTEASE BY *ACETOBACTER ACETI*
—DEENA MENDEZ, A.V.M. KUTTY AND S.R. PRASAD
- 195–204 MICROBIAL BIOCONVERSION OF WHEY FOR INDOLE-3-ACETIC ACID PRODUCING BIOINOCULA
—VRUSHALI G. GADEKAR, MADHUKAR KHETMALAS AND BALU KAPADNI
- 205–209 A COMPARATIVE STUDY ON BIODEGRADATION OF AMMONIUM NITROGEN TO NITRITE IN FERTILIZER EFFLUENT BY *NITROSOMONAS SPECIES* (NCIM 5071) AND *NITROSOMONAS EUROPAEA* (MTCC 134)
—V. SRIDEVI, A. KIRANMAI AND P. ANVESH
- 211–221 ENUMERATION OF TERRESTRIAL MYCOBIOTA AND AFLATOXIN IN DRINKING WATER
—N. BANU, B. MALAIKUMAR AND S. PAVITHRA
- 223–226 ASSESSMENT OF GROUNDWATER QUALITY STATUS AROUND ASH POND
—SANGEETA MADAN, CHANCHAL AND ATHAR HUSSAIN
- 227–232 EFFECT OF ETHANOL ON THREE POOLS OF GLYCOGEN IN TOP FLOCCULATING STRAIN OF *Saccharomyces cerevisiae*-3441
—M.S. DAKE AND N.B. PATIL
- 233–238 OPTIMIZATION OF GROWTH CONDITIONS FOR CRUDE OIL AND N-HEXADECANE DEGRADING *PSEUDOMONAS* SPP. FROM INDUSTRIAL AREAS
—SUJA AUGUSTINE AND B.V. PRADEEP
- 239–247 RAPID IDENTIFICATION OF GENETIC VARIATION OF *ASPERGILLUS FLAVUS* ISOLATED FROM DIFFERENT WATER SOURCES BY RANDOM POLYMORPHIC DNA ASSAY
—BANU NARASIMHAN AND PAVITHRA PUSHKAR
- 249–256 ROLE OF SALIVARY GLANDS SECRETED GROWTH FACTORS ON DIFFERENTIATION OF CD3 AND CD5 CELLS OF THYMUS IN MICE
—M.V. WALVEKAR, S. R. DESAI, S. P. KHAIRMODE AND M. M. PILLAI
- 257–261 DETECTION OF *GELE* AND FACTORS AFFECTING GELATINASE ACTIVITY OF *ENTEROCOCCUS FAECALIS* ISOLATES
—M. PRASANTH, MEERA RAJU, S. DIVAKAR, S. ABIRAMI, H. HAJARAH, K. UMA HARINI, S. SENTHILNATHAN AND C. BENEDICT PAUL
- 263–270 EMERGING ROLE OF THE DELTA OPIOID SIGNALLING PATHWAY IN TREATING NEUROLOGICAL DISORDERS –A FOCUSED REVIEW
—ERFATH THANJEEM B. AND DWAIPAYAN SEN
- 271–274 SCREENING OF PHOTOTROPHIC BACTERIAL ISOLATES FOR POTENTIAL CARBON SEQUESTERS WITH REFERENCE TO BIOMASS YIELD
—B. RAJANI, CH. L.P. SIVA KUMARI AND M. UMA DEVI
- 275–280 PERFORMANCE ANALYSIS OF VERTICAL AXIS WIND TURBINES FOR A LOW WIND ZONE SITES - AN ANALYTICAL CASE STUDY ON TWO DIFFERENT TYPES OF ECO FRIENDLY FLUX MACHINES
—T. SIVAKUMAR, K. SIVAKUMAR AND B. SIVARAMAN

The views expressed in various articles are those of the authors and not of the Editors of the Journal.

Printed at **Cambridge Printing Works**, New Delhi-110 028. Phone : 9811860113

SEDIMENTATION RATE AND THE EFFECT TOWARD CAPACITY ON BILI-BILI RESERVOIR, INDONESIA

AHMAD RIFQI AOSRIB, YASSER ABD. DJAWAD AND GUFRAN DARMA DIRAWAN

Makassar State University, Jl. Bonto Langkasa, 90222, Makassar,
South Sulawesi, Makassar, South Sulawesi, Indonesia

(Received 7 September, 2015; accepted 17 November, 2015)

Key word : Sediment, Reservoir capacities.

Abstract– A decrease in the capacity of a reservoir due to sediment entering the reservoir exceeds the allowed rate. Therefore it is very necessary research that can provide information on the balance of sediment inflow into the reservoir and the sediment is allowed that can be used as a reference in maintaining the capacity of the reservoir sustainable capacity. Sedimentation rate control performed in Bili-Bili dam due to the avalanche of material Mount Bawakaraeng upstream reservoirs Jeneberang in order to function optimally. This study was conducted to obtain data on sedimentation rate, and the rate of sediment entering the reservoir capacity to know how long the sediment flow is not caused debris flow downstream reservoirs. The results showed that the changes in the surface of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%. Then, the volume of reservoir sedimentation is based on high-elevation surface shows that the majority (75.7%) sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. Dead storage capacity of the reservoir has been filled more than 50%.

INTRODUCTION

The main cause of the reduction in storage capacity of dams in Indonesia is the high rate of sedimentation (Azdan *et al.*, 2008). According to the Center for Research and Development of Water Resources (2008) also mentioned several reservoirs are experiencing high sedimentation rate is Sengguruh and Karangates watershed Kalibrantas Hulu, The reservoir watershed Solo, Reservoir Mrica watershed Serayu, Saguling and Cirata in Citarum Central and Bili-Bili Reservoir Watershed Jeneberang South Sulawesi.

Bili-Bili reservoirs also have experienced land erosion rate of 4.25 tonnes/ha/year. Classification of very severe erosion hazard level occurs on dry land amounted to 33.32 tonnes/ha/year. Zubair (2001) simulated the estimation of sediment in the watershed Jeneberang based tendencies that exist today. Sediment in 2001 amounted to 2000 m³ / km² / year and increased by 24.2% to 2608 m³/km²/year in

2005, and amounted to 122.8%, or 4678 m³/km²/year in 2010, higher than the rate of Allowable (1500 m³/km²/year) into the Dead Storage Capacity (DSC) Bili-Bili dam. Environmental Research Center, University of Hasanuddin (2000) mentions that the results of measurements of sediment transport in the river channel Jeneberang ever done over a span of 15 years, ie from 1986 to 2001 showed an increasing trend of sediment by an average of 40 tonnes/ha/year with an average rate of 2.67% per year. From the results of research conducted Fadiah (2006) turns on the Catchment Rain (DTH)

Increased sedimentation occurred in 2005 with the entry of sediment derived from G. Bawakaraeng avalanche caldera wall is equal to 22,686,654 m³ (Bapro NRM, 2005). Zubair (2001) stated that the source of sediment in reservoirs Bili-Bili derived from soil erosion (71.22%), erosion as a result of landslides and erosion of river banks (28.78%). Potential sediment due to avalanches large enough flows downstream when high rain intensity so

*Corresponding author's email: ahmad_rifqiasrib@yahoo.co.id and gufrandarma@yahoo.com

prone to debris flows with high concentrations. River conditions Jeneberang are still continuous stream sediment during floods and sediment along the river flow to the reservoir Bili-Bili led to increased sedimentation in reservoirs Bili-Bili causing silting of the reservoir, which in turn will reduce the operating life of the dam and threaten the sustainability of the reservoir function. It also becomes important to be studied considering these reservoirs have a very important role in the context of socio-economic development of society, especially for the city of Makassar and Gowa Regency.

The purpose of this study was to analyze the rate of sedimentation of rivers and reservoirs upstream Jeneberang Bili-Bili due to avalanche caldera and analyze the rate of sedimentation and reservoir capacities of Bili-Bili

RESEARCH METHOD

Research Location

The location of this research is physically located in the DAS system Jeneberang. In this study the limits used are physical limitations have a direct impact on the carrying capacity of the reservoir Bili-Bili, the basin Jeneberang. Administratively the study area Bili-Bili dam is located in Gowa, South Sulawesi Province.

Stages of Research

Research focused on field data collection activities that aim to analyze the sedimentation rate Jeneberang river upstream and reservoir sedimentation rate Bili-Bili.

a. Types and sources of data

The type of data used to analyze avalanches and rate of sedimentation in reservoirs Bili-Bili consist of primary data and secondary data. Primary data collected is the elevation of sedimentation along rivers and reservoirs Jeneberang Bili-Bili obtained based on measurements echosounding in reservoirs, and secondary data from the watershed and reservoir characteristics of Bili-Bili based on the results of the field survey. The secondary data collected is the data infrastructure Bili-Bili dam of NRM Hall and Public Works, climate and weather conditions of the Meteorology and Geophysics Agency.

b. Method of collecting data

Methods of data collection is done by the field

survey to obtain primary data needed to conduct observations of sediment at some point observations representative. Measurement activities directed to take primary data such as elevation of sedimentation in water bodies and reservoirs. Collection of secondary data, conducted at various institutions related to the management of reservoirs and studying literature.

c. Data analysis

Calculation of the volume of sediment due to the avalanche caldera done some analysis: descriptive description via digital contour maps and secondary data to determine the state of the characteristics of the reservoir catchment area. furthermore, an analysis along the river upstream reservoirs Jeneberang and Bili-Bili and sedimentation control capacity analysis using building Sabo Dam

RESULTS AND DISCUSSION

The rate of sedimentation in reservoirs Bili-Bili analyzed using measurement data echosounding taken by 22 line cross section (L1-L22) along the reservoir area Bili-Bili. For each transverse depth data taken by boat and echosounding tool. Data collected for each transverse lines on average 50-100 times depending on the mileage and condition of the location. At each point is also made plotting the coordinates to determine the location and position of the point of data collection.

Volume of reservoir sedimentation that every year as measured by the data echosounding further analyzed based on cross-sectional area for each point of the cross section. Volume is calculated based on cross-sectional area to the distance between each point of the cross section. Volume for each year is calculated based on the last elevation data.

Based on the results of data analysis for each cross-section shows that the rate of reservoir sedimentation in 2014 had reached a total of 75,055,327 m³. If seen changes in sedimentation rate before the avalanche caldera which amounted to 8,376,013 m³ (1997-2001) and 14,558,105 m³ (2001-2004) until 2014, shows that the increase is quite high, especially in 2004-2005, namely amounted to 21,743,403 m³. More details are presented in Table 1.

Based on data from 1997 to 2014 showed an increase in sedimentation in reservoirs Bili-Bili. Increased sedimentation was mainly in 2005 has reached elevation above 60 m (at a distance of less

Table 1. Volume Sedimentation per cross-section of the Year 1997-2014

Cross-section	Volume Sedimentation (m ³)							
	1997 - 2001	2001 - 2004	2004 - 2005	2005 - 2006	2006 - 2007	2007 - 2008	2008 - 2013	2013 - 2014
L1 - L2	409.856	763.793	1.891.909	-293.390	258.556	261.401	386.616	3.417.340
L2 - L3	713.636	792.669	1.533.420	341.081	-277.302	319.661	311.805	3.415.309
L3 - L4	368.501	939.762	1.213.782	606.729	-468.159	285.148	458.805	3.119.420
L4 - L5	-83.064	1.155.873	-103.206	344.451	-297.905	203.527	567.300	1.583.448
L5 - L6	510.017	1.213.466	-187.245	225.511	302.773	832.048	780.298	2.844.820
L6 - L7	1.222.885	724.021	146.792	444.095	90.293	439.258	916.748	3.544.834
L7 - L8	410.489	33.860	2.426	294.374	146.836	-98.698	893.100	1.781.086
L8 - L9	-140.736	38.679	770.972	-1.180.029	1.012.080	253.517	2.296.148	2.797.114
L9 - L10	-588.242	91.733	1.525.169	-926.715	887.616	447.761	1.370.925	2.360.486
L10 - L11	-338.013	225.388	2.546.338	-918.752	1.299.883	943.648	819.973	3.634.817
L11 - L12	1.773.260	672.264	2.812.859	-824.250	625.277	1.323.508	626.262	5.685.673
L12 - L13	2.302.718	1.789.475	954.262	1.451.066	-177.507	1.166.898	511.840	6.831.854
L13 - L14	1.308.677	1.817.775	314.865	2.091.326	-870.950	410.868	265.050	4.926.742
L14 - L15	465.101	1.200.576	1.483.342	999.684	-545.585	-242.826	13.870	3.616.988
L15 - L16	-85.844	1.463.717	2.010.121	612.978	567.781	-307.047	137.009	4.705.762
L16 - L17	24.119	520.796	2.305.184	776.520	62.289	356.925	757.904	4.446.812
L17 - L18	321.434	-187.524	2.166.379	589.703	-388.331	852.853	938.192	3.439.853
L18 - 19	106.759	296.976	859.526	481.675	-207.272	634.998	562.324	2.099.988
L19 - 20	-325.541	1.004.805	-439.201	1.435.896	-792.915	416.070	1.205.163	2.088.207
L20 - 21	0	0	-63.966	22.526	-16.769	0	193.609	135.400
L21 - L22	0	0	-326	-2.991	0	0	83.173	79.856
Total	8.376.013	14.558.105	21.743.403	6.571.487	1.210.690	8.499.518	14.096.113	75.055.327

than 1 km from the dam). When compared to 2004 which is still in elevation of 50 m. This show has been an increased sedimentation of about 10 m in just over 1 year. Events avalanche caldera in 2004 is the cause of increased sedimentation, but then the rate of sedimentation in reservoirs Bili-Bili can be controlled by reducing the percentage increase in sedimentation for 2006 through 2014.

Overall results of reservoir sedimentation volume measurement is obtained that the sedimentation rate before the landslide caldera, which is accommodated in the reservoir sedimentation Bili-Bili cumulatively amounted to 8.376 million m³ (April, 2001). After the landslide is the sediment volume in 2014 reached 75.055 million m³. Accumulation of reservoir sedimentation rate is highest when the avalanche caldera after the incident in 2004, but then can be controlled in the next year until 2014.

Volume sedimentation into reservoirs Bili-Bili distributed based on the elevation of the base of the reservoir. Based on the technical data Bili-Bili dam building shows that, for the elevation of 101.6 to 99.5 m is the capacity of the reservoir to function as flood control and to limit the supply of raw water elevation is at 99.5 to 65 m. As for capacity Capacity



Dead (dead storage) at an elevation of 65 m with a maximum of reservoirs is 29 million m³.

Volume of reservoir sedimentation when analyzed by high-elevation surface shows that the majority of sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³ or 75.7% of the total sediment into the reservoir. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir is at an elevation below 65 m. however, if it is seen specifically in dead storage reservoirs, it means that the dead storage capacity has been filled more than 50%. More details can be seen in Table 2.

Based elevation data (echosounding) for each point of the cross section (L1-L22) are taken along the reservoir area Bili-Bili and data point coordinates of each point of observation, analysis 3D using statistical software Surfer 8 to get a visualization of surface changes the results of reservoir sedimentation from 1997 to 2014. The analysis showed that in 1997 the surface sedimentary deposit at a depth of less than 65 m (capacity of the dead) is still in a state of normal (Figure 1). However, the differences are very significant visible if seeing the results of the plot to 2014 which saw the sediment surface is getting higher sedimentation (red color changes

Table 2. Percentage of total sedimentation of the reservoir capacity

Reservoir capacity (1000m ³)	Elevation (m)	Sedimentation (1000 m ³)	Total (1000 m ³)	%	
Flood Control	41.000	100 - 101.6 99.5 - 100	1.697 1.454	3.151	4,2
Raw Water	305.000	90 - 99.5 80 - 90 70 - 80 65 - 70	11.602 26.501 15.183 3.549	56.835	75,7
Capacity Dead	29.000	60 - 65 50 - 60 40 - 50	8.279 6.395 394	15.069	20,1
Total	375.000		75.055		100

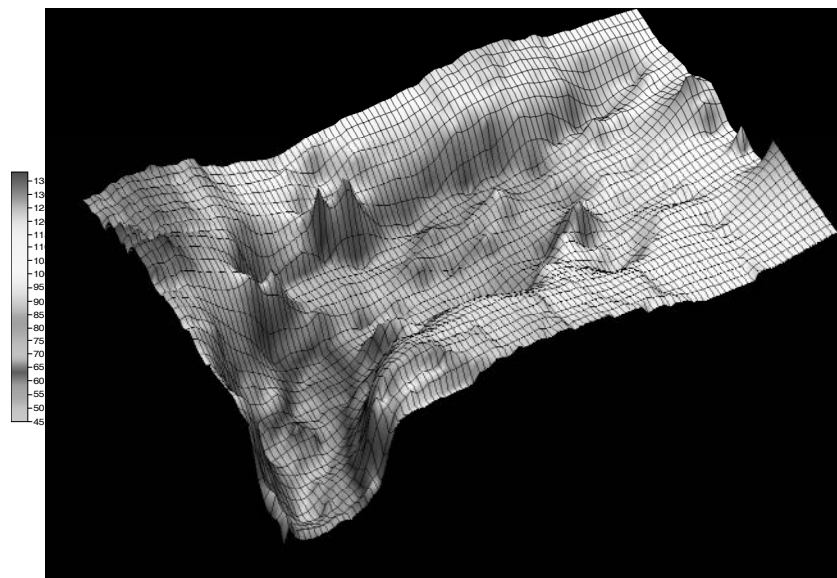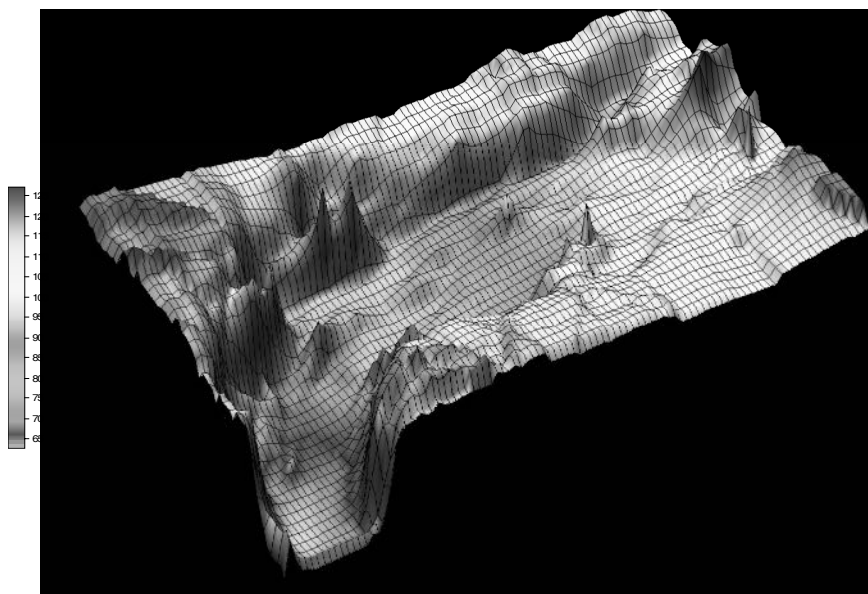**Fig. 1.** Visualization of sedimentation in reservoirs Bili-Bili 1997.**Fig. 2.** Visualization of sedimentation in reservoirs Bili-Bili 2014.

increasingly dominant) reaches a maximum elevation to the capacity limit capacity to die (Figure 2). Comparison of the state of the surface change results of reservoir sedimentation that occurred in 1997 and 2014 showed increased levels of sedimentation that can significantly impair the function of the reservoir.

Further, when considering the results of the analysis of the results of reservoir sedimentation

surface changes after the events avalanche caldera in 2004 which turned out to have an impact on the measurement results in 2005. The change appears to have shown a rapid improvement, especially in the area below the elevation of 65 m (capacity of the dead).

From the analysis of three-dimensional visualization also illustrates clearly that changes the surface of the reservoir sedimentation results from

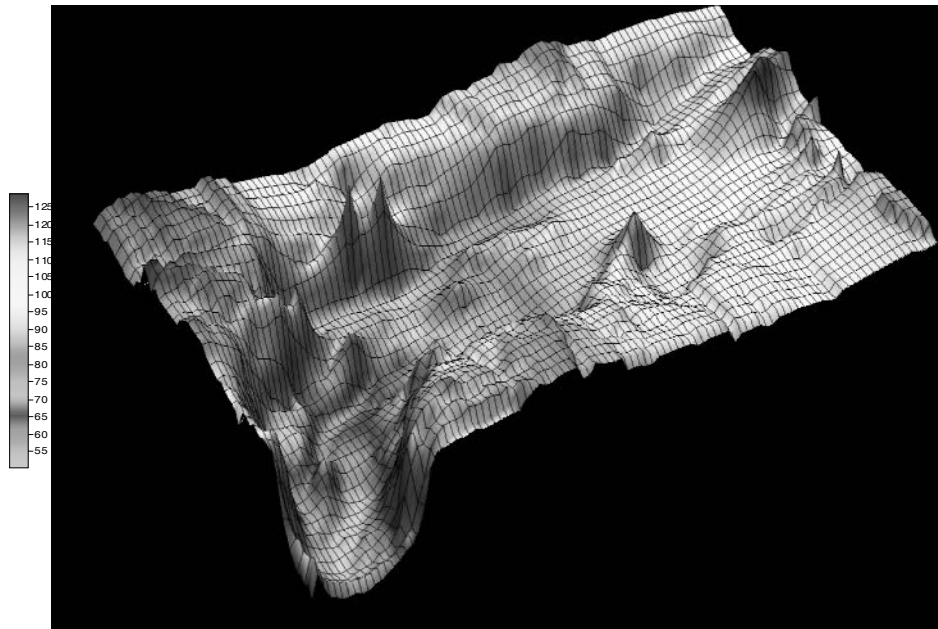


Fig. 3. Visualization of sedimentation in reservoirs Bili-Bili 2004.

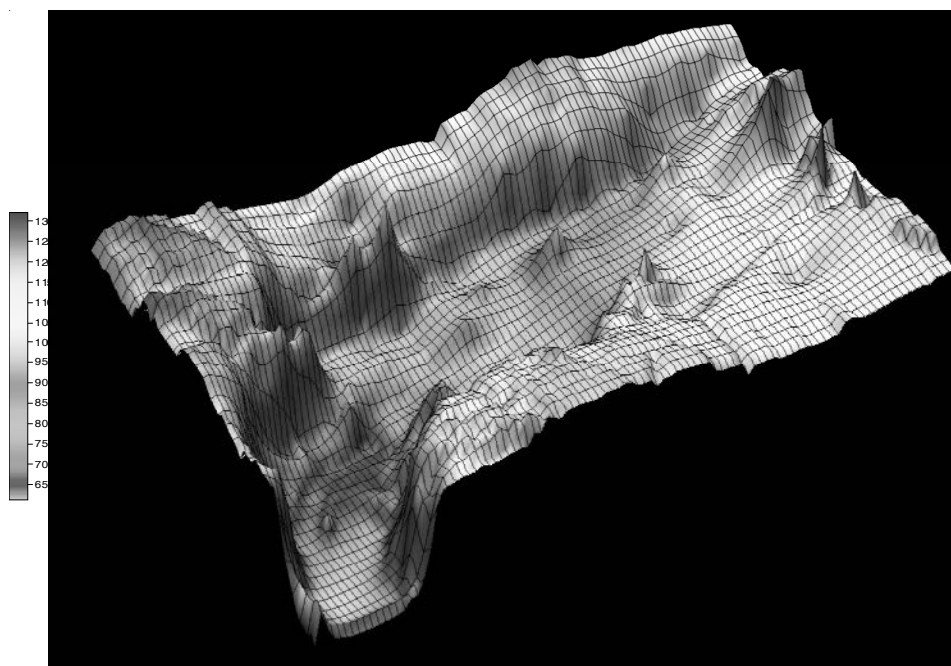


Fig. 4. Visualization of sedimentation in reservoirs Bili-Bili 2005.

1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if the sediment that reaches the area is only about 20%.

CONCLUSION

Sedimentation occurred at an elevation of 65 to 99.5 m in the amount of 56.835 million m³. Then at 15.069 million m³ (20.1%), which reached the dead bin reservoir at an elevation below 65 m. Dead storage capacity of the reservoir has been filled more than 50%. Furthermore, from the analysis of three-dimensional visualization of the surface it appears that the change of reservoir sedimentation results from 1997 through 2014 with a capacity of 75 million m³ volume into reservoirs distributed unevenly. The volume of sediment into the reservoir is more concentrated predominantly in the upper area of the reservoir. Nevertheless dead storage area (capacity of the dead) near the dam still be controlled even if

the sediment that reaches the area is only about 20%.

REFERENCES

- Azdan, M.D. and Candra, R.S. 2008. *Kritisnya Kondisi Bendungan di Indonesia*. Di dalam Seminar Komite Nasional Indonesia untuk Bendungan Besar (KNI-BB). Surabaya. 2-3 Juli 2008.
- Asrib, A.R., Purwanto, Y.J. and Erizal, 2014. *Analysis of Erosion Level Using Map Windows Agricultural Non Point Source Pollution (MWAGNPS) on Jeneberang Sub-Watershed South Sulawesi Province*. International Journal of Science and Engineering. 6(1): 1-5.
- Bapro, PSDA. 2005. *Laporan Hasil Echosounding Waduk Bili-Bili*. Bagian Proyek Pengelolaan Sumber Daya Air Jeneberang. Makassar.
- Fadiah, 2006. *Kajian Pengaruh Erosi Lahan terhadap Sedimentasi di Waduk Bili-Bili Kabupaten Gowa Propinsi Sulawesi Selatan*. [Tesis]. Sekolah Pascasarjana, Universitas Gadjah Mada. Yogyakarta.
- PPLH UNHAS, 2000. *Pengelolaan Terpadu Daerah Aliran Sungai (DAS) Jeneberang Tahap I*. Pusat Penelitian Lingkungan Hidup. Makassar.
- Zubair, H. 2001. *Model Pengendalian Sedimen untuk Mempertahankan Kapasitas Waduk*. Pusat Penelitian Lingkungan Hidup Universitas Hasanuddin. Makassar.