

PAPER NAME

4_h_10_Key_Engineering_Materials_811_158_opt.pdf

AUTHOR

Samnur Samnur

WORD COUNT

1826 Words

CHARACTER COUNT

9286 Characters

PAGE COUNT

5 Pages

FILE SIZE

497.2KB

SUBMISSION DATE

Feb 20, 2023 9:06 AM GMT+8

REPORT DATE

Feb 20, 2023 9:06 AM GMT+8

● 9% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 7% Internet database
- 8% Publications database
- Crossref database
- Crossref Posted Content database
- 5% Submitted Works database

● Excluded from Similarity Report

- Bibliographic material
- Quoted material
- Cited material
- Small Matches (Less than 10 words)
- Manually excluded sources

Effect of Sintering Temperature on Crystal Structure and Surface Morphology of NdFeO₃ Oxide Alloy Materials Prepared by Solid Reaction Method

J. Agus^{1,a}, S. Samnur^{2,b}, K. Triyana^{3,c}, and E.H. Sujiono^{1*}

¹Department of Physics, Universitas Negeri Makassar, Indonesia

²Department of Mechanical Engineering, Universitas Negeri Makassar, Indonesia

³Department of Physics, Universitas Gadjah Mada, Yogyakarta, Indonesia

^ajasdarphysics@gmail.com, ^bsamnur74@gmail.com, ^ctriyana@ugm.ac.id

*Corresponding author: e.h.sujiono@unm.ac.id; Tel: +628114105272

Keywords: Nd_{1+x}FeO₃, sintering temperature, crystal structure, surface morphology, solid-state reaction

Abstract. This research to study the effect of sintering temperature on the crystalline structure and surface morphology of NdFeO₃ oxide alloy materials. NdFeO₃ was synthesized by solid-state reaction method with the mixing of 99.9% Nd₂O₃ and 99.9% Fe₂O₃ as precursors. Three samples with the different process were made in this experiment. The 1st (#1) and 2nd (#2) samples were sintered for 84 hours at 950°C and 600°C. Calcination process was done at 950°C for 50 hours. The 3rd (#3) sample was sintered for 84 hours at 600°C without calcination process. The samples were characterized by using SEM (Scanning Electron Microscopy) and XRD (X-Ray Diffraction). Based on the SEM characterization result, it was obtained that the sintering temperature influence on surface morphology of NdFeO₃ grain size. The XRD analyze was obtained FWHM (Full Width at Half Maximum) value of sample #1, #2 and #3 are 0.11°, 0.10°, and 0.31°, respectively. The value of FWHM was associated with the peak at 2 Θ of 32.53° for all sample; it is indicated of *hkl* (121). Further calculation based on crystallography data was carried out by Rietveld method with rietica software, and the best quality will be applied as a gas sensor materials.

1. Introduction

Combustion-related emission gases usually include CO₂, CO, hydrocarbons (HCs), volatile organic compounds (VOCs), NO_x and O₂ [1]. According to Euro-VI, the limit values for CO, NO_x, and HCs are 1, 0.06 and 0.1 g km⁻¹, respectively. The exhaust gases are the relatively corrosive environment, for example, the vehicle exhaust gases CO, HCs and NO_x have concentrations up to a level of 10, 0.2 and 0.1 vol.%, respectively [2]. They are highly active and poisonous gases. For this reason, control and measurement of the concentrations of these gases are very important in reducing environmental pollution.

The nano-perovskite oxides with the structure of ABO₃ (A: La, Nd, Sm, and Gd; B: Fe, Co and Ni; and O: oxygen) have a high catalytic activity and high sensitivity with CO and HCs. Their applications in gas sensors were studied especially for the properties in electrical and response for CO gas [3]. The rare-earth orthoferrites, having perovskite structure of YFeO₃ have been investigated in a wide variety of applications such as solid-oxide fuel cells [1], gas sensors [2,4], photo-catalysis and vehicle catalytic converters [5-7]. NdFeO₃ (NFO) is a perovskite transition metal oxide with an orthorhombic structure and space group of Pbnm possesses insulator character at room temperature [8].

NdFeO₃ have a high sensitivity on CO, H₂S, and ethanol [9]. In this study, NdFeO₃ sample was synthesized by solid-state reaction method. In this paper, we reported the result of the effect of sintering temperature on the crystalline structure and surface morphology of Nd_{1+x}FeO₃.

2. Experimental Method

$\text{Nd}_{1+x}\text{FeO}_3$ oxide alloy was synthesized using raw material powder of Nd_2O_3 (99.9%) and Fe_2O_3 (99.9%) by solid-state reaction method. Preparation of three samples NdFeO_3 material used same molar ratio which is $x = 0$. The initial calculation of raw material mass used Proust law with the chemical formula as shown in equation (1):



The mixing of powder with raw material was crushed by mortar and pastel for 3 hours to maximize the reaction by extending the contact between the surface of reactants and reagents be mixed homogeneously. The #1 sample was calcined at 950°C for 50 hours and then crushed again for 5 hours. The samples were pelleted and sintered at 950°C for 84 hours. The #2 sample was calcined at 950°C for 50 hours and then crushed again for 5 hours. The samples were pelleted and sintered at 600°C for 84 hours. The #3 sample was sintered at 600°C for 84 hours without calcination process. All the samples were synthesized and then characterized using XRD and SEM to identify and analyze the crystalline structure and surface morphology.

5. Results and discussion

The XRD spectra are shown in figure 1. The spectrum shows the increase of the peak intensity and widens of the width peaks when the sintering temperature is added. Figure 1 shown the highest intensity variation of the sample #1 at 2θ of 32.53° which are related with the intensity of 984.56 counts, followed by sample #2 at 2θ of 32.53° related with the intensity of 216.84 counts, and sample #3 at 2θ of 32.53° related with the intensity of 53.89 counts, respectively. All of the samples showed (hkl) position at (121). For sample #3, (hkl) position at (121) is not dominant. This result indicates that the raw materials powder has well reacted during the preparation process to form of NdFeO_3 alloy, as was reported elsewhere [8].

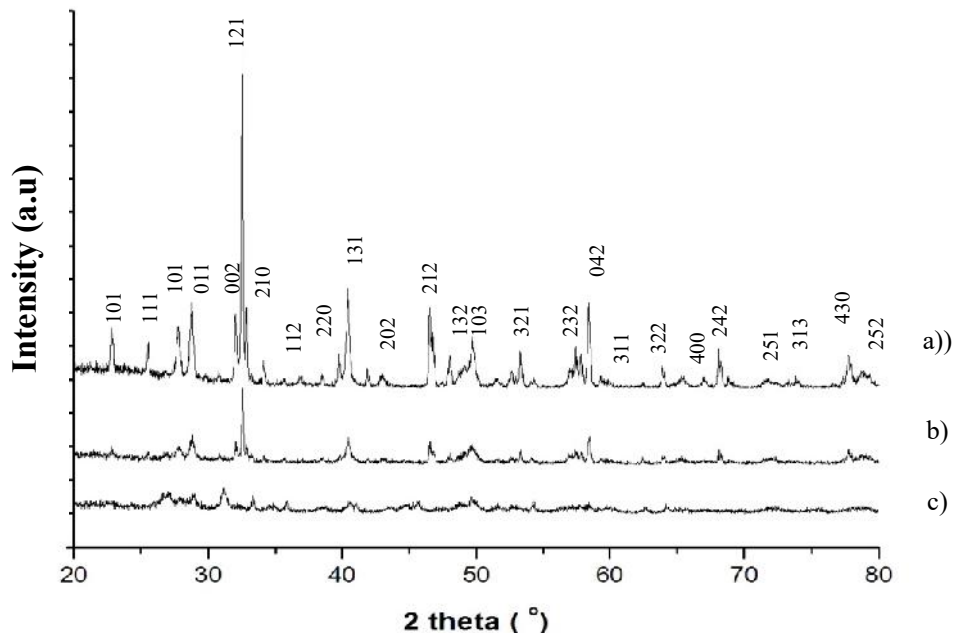


Figure 1. XRD spectra of sample NdFeO_3 alloy a) sample #1, b) sample #2, and c) sample #3 was prepared using solid-state reaction method.

The XRD characterization result obtained that the sintering temperature influence of the FWHM value. The FWHM value is 0.11° , 0.10° and 0.31° for sample #1, sample #2 and sample #3, respectively. The result we know that for adding sintering temperature is not really influenced FWHM, it is has shown the FWHM of sample #1 is wider than sample #2.

The highest intensity and FWHM value obtained the best quality of the crystalline structure is for sample #1 this is related with the intensity of 984.56 counts and 0.11° . This result is similar with reference had reported[1,5,6,10-15], although the sample prepared using a different method.

Phases analysis using *Match!* the software showed that there are four phases that contain in each sample: NdFeO_3 , $\text{Nd}(\text{OH})_3$, Fe_2O_3 and Nd_2O_3

Table 1. Phase analysis of the samples $\text{Nd}_{1+x}\text{FeO}_3$.

Sample	NdFeO_3 (%)	Nd_2O_3 (%)	Fe_2O_3 (%)	$\text{Nd}(\text{OH})_3$ (%)
#1	74	2	14	10
#2	72	11	8	9
#3	55	7	38	-

The data of phase composition as described in table 1 indicate that each sample was containing a few percents of $\text{Nd}(\text{OH})_3$ and there are still formed Nd_2O_3 and Fe_2O_3 phase. This means that the temperature was used to synthesis NdFeO_3 alloy should be higher than 950°C or another way with increased the heating time to get perfectly reaction that occurs and lattice -OH was missing.

The morphology, structure and particle size of samples $\text{Nd}_{1+x}\text{FeO}_3$ as a variation of sintering time were investigated by SEM. Figure 2 shows the SEM micrograph of the samples.

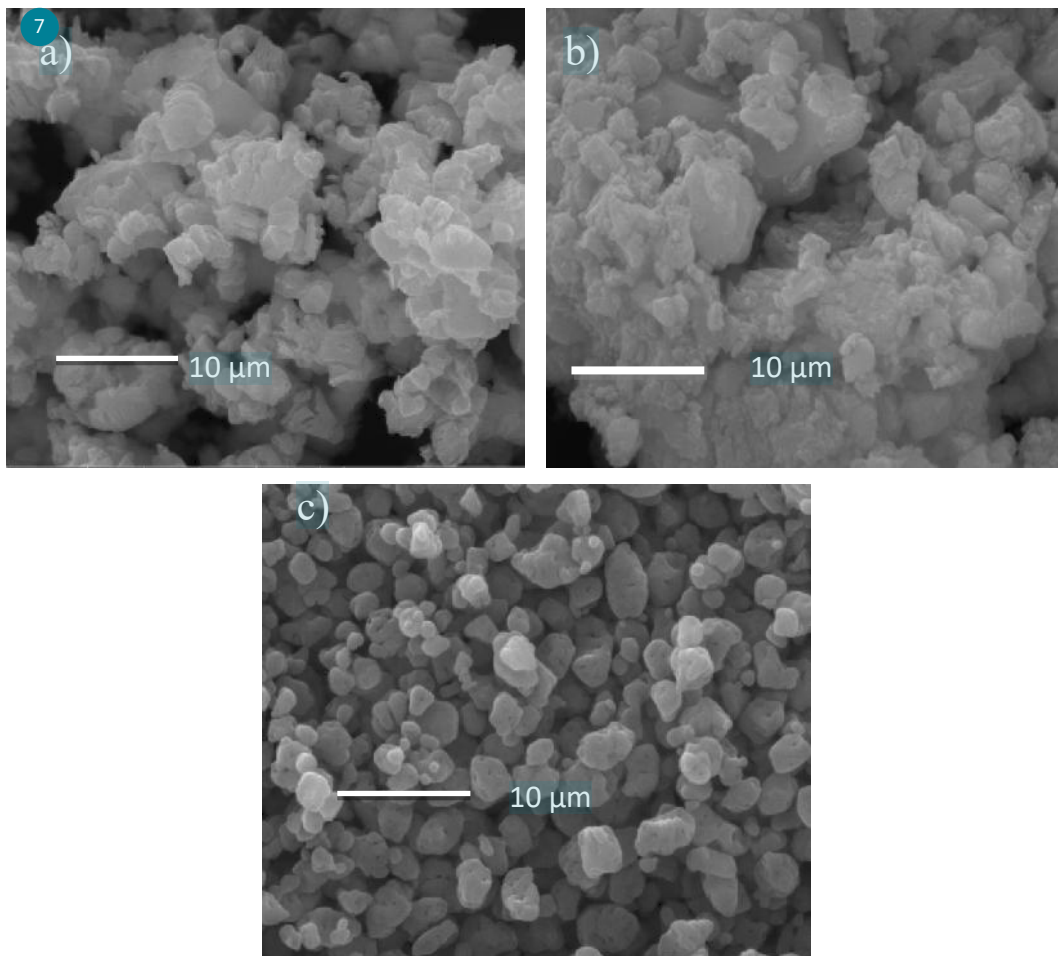


Figure 2. SEM image of NdFeO_3 alloy a) sample #1, b) sample #2 and c) sample #3, respectively.

Figure 2 shown SEM image of NdFeO₃ alloy was prepared with different parameter process. As shown in the figure, 2a) that grain size of the NdFeO₃ alloy formed well connected and there is did not observe grain boundaries. This data indicated that the result of phase composition was obtained is confirmed. On the other hand, based on figure 2c) shows that many of grain size shape were observe and this is caused by appearing of grain boundaries. Its means the raw material is not reacted perfectly as also confirmed from the phase composition of the result as sample #3.

Determination of crystalline size can be calculated using the Scherrer equation. Based on the calculation was obtained grain size of the samples #1, #2, and #3 are $147.83 \pm 0.01\text{nm}$, $162.69 \pm 0.01\text{nm}$ and $52.94 \pm 0.01\text{nm}$, respectively. Similar results were obtained by Khorasani-Motlagh M. et al. that synthesis nanocrystals NdFeO₃ materials with has good porosity and the crystalline size ranging from 28.82 nm and 200.71 nm [7]. These results indicate well confirmation between XRD analysis and surface morphology of the SEM image. Therefore we confirmed that the sintering temperature also influences the grain size and grain boundary of the sample was prepared by solid-state reaction [6,9,16].

4. Conclusion

NdFeO₃ alloy has been prepared by solid-state reaction method. There is well confirmation between XRD analysis and SEM image. These results indicate that the sintering temperature influences the diffraction intensity, FWHM value, and grain size. Dominated of *hkl* 121 phase of NdFeO₃ alloy prepared using solid state reaction are useful for further application as a gas sensor.

Acknowledgment

³ This research was funded by Directorate research and Community Services, Directorate General of Research and Development, Ministry of Research, Technology and Higher Education, Republic of Indonesia, under research scheme of *Hibah Kompetensi* fiscal year 2016.

References

- [1] Gaibei Song, Junjie Jiang , Baojuan Kang , Jincang Zhang , Zhenxiang Cheng, Guohong Ma, Shixun Cao. *Solid State Communications*. 211 (2015) 47–51.
- [2] Ho T G et al. *Advanced in Natural Science: Nanoscience and Nanotechnology* 2 (2011) 015012–15021
- [3] Ru Z et al. *Journal of Rare Earths* 28 (2010) 591–595
- [4] Shanker J, Suresh M B and Babu D S. *International Journal of Scientific Engineering and Research* 3 (2015) 194–197
- [5] Papa, F. et al *Revue Roumaine de Chimie*. (2010) 33-38.
- [6] Minh, D. L. et al. *Adv. Nat. Sci: Nanosci. Nanotechnology* (2016) 1-12.
- [7] Khorasani-Motlagh M, et al. *International Journal of Nanoscience and Nanotechnology* 9 (2013) 7–14.
- [8] Xinshu, N. et al. *Journal of Rare Earth*.**21** (2003) 630-632.
- [9] Yabin, W. et al. *Journal of Crystal Growth*. **318** (2011) 927–931.
- [10] Sadhan C. et al. *Materials Research Bulletin*. **48** (2103) 1688–1693.
- [11] Singh S. et al. *Sensors and Actuators B*. **177** (2013) 730– 739.
- [12] Shivakumara, C. *Solid State Communication*, (2006) 165-169.
- [13] T. Pikula. et al. 2014. *Journal of Alloys and Compounds*. **606** (2014) 1–6.

- [14] Wu, A. et al. Asia-Pacific Journal of Chemical Engineering (2009) 518-521.
- [15] Xiangdong, L. et al. Journal of Rare Earths , (2005) 328-331.
- [16] Zhang, N. et al. Materials Chemistry and Physics (2009) 160-167.

● **9% Overall Similarity**

Top sources found in the following databases:

- 7% Internet database
- 8% Publications database
- Crossref database
- Crossref Posted Content database
- 5% Submitted Works database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	bmsit.ac.in Internet	2%
2	Jada Shanker, G. Narsinga Rao, Kasarapu Venkataramana, D. Suresh B... Crossref	1%
3	thieme-connect.de Internet	1%
4	nature.com Internet	1%
5	Ying Wei, Yongan Wang, Fupeng Zheng, Wei Mu, Tianjiao Huang. "Prep... Crossref	1%
6	Padjajaran University on 2022-04-22 Submitted works	<1%
7	downloads.hindawi.com Internet	<1%

● Excluded from Similarity Report

- Bibliographic material
- Cited material
- Manually excluded sources
- Quoted material
- Small Matches (Less than 10 words)

EXCLUDED SOURCES

Jasdar Agus, S. Samnur, Kuwat Triyana, E.H Sujiono. "Effect of Sintering Tem...	82%
Crossref	
researchgate.net	29%
Internet	
scientific.net	18%
Internet	
Yue Jun Chen, Zhi Fa Wang, Jing Long Bu, Li Xue Yu, Rong Lin Wang, Rui Shen...	15%
Crossref	
zh.scientific.net	15%
Internet	
chem.itb.ac.id	12%
Internet	
E. H. Sujiono, J. Agus, S. Samnur, K. Triyana. " Effects of Molar Ratios and Sin...	10%
Crossref	
Juliandri, Agung Nurfadillah, Rukiah, Muhamad Nasir, Rubianto A. Lubis. "Syn...	7%
Crossref	
Kusharjanto Kusharjanto, Syoni Soepriyanto, Akhmad Ardian Korda, Supono A...	7%
Crossref	

eprints.unm.ac.id	6%
Internet	
iopscience.iop.org	5%
Internet	
Truong Giang Ho. "Nanosized perovskite oxide NdFeO₃ as materi...	5%
Crossref	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
School of Business and Management ITB on 2019-07-02	5%
Submitted works	
Mia Ledyastuti, Galuh Sukmarani. "Effect of Microcellulose on Wettability of R...	4%
Crossref	
Indra Noviandri, Ajeng Raminas. "The Effect of Tartrazine in Voltammetric Det...	4%
Crossref	
School of Business and Management ITB on 2019-07-02	4%
Submitted works	

School of Business and Management ITB on 2019-07-02	4%
Submitted works	
Truong Giang Ho, Thai Duy Ha, Quang Ngan Pham, Hong Thai Giang, Thi Anh ...	4%
Crossref	
School of Business and Management ITB on 2020-06-05	4%
Submitted works	
repository.knuba.edu.ua	4%
Internet	
V Zharvan, Y N I Kamaruddin, S Samnur, E H Sujiono. " The Effect of Molar Rat...	4%
Crossref	
bio.med.sumdu.edu.ua	4%
Internet	
E. H. Sujiono, M. Y. Dahlan, R. A. Imran, A.C. M. Said, S. Samnur. " The Effects ...	4%
Crossref	
link.springer.com	4%
Internet	
E. H. Sujiono, R. A. Imran, M. Y. Dahlan, A.C. M. Said, S. Samnur, N. Ihsan. " Inf...	4%
Crossref	
Niño B. Felices, Bryan B. Pajarito. "Effect of Silane-Treated Wollastonite on M...	4%
Crossref	
Padjadjaran University on 2022-04-22	4%
Submitted works	
School of Business and Management ITB on 2022-09-22	4%
Submitted works	

Universitas Sumatera Utara on 2018-03-21	4%
Submitted works	
Padjadjaran University on 2022-04-22	4%
Submitted works	
idr.uin-antasari.ac.id	4%
Internet	
Ahmad Kamil Fakhruddin, Hasmaliza Mohamed. "Effect of Sintering Temperat...	4%
Crossref	
jurnal.itats.ac.id	3%
Internet	
repo.dma.dp.ua	3%
Internet	
iue.tuwien.ac.at	3%
Internet	
Padjadjaran University on 2022-04-25	3%
Submitted works	
Padjadjaran University on 2022-04-22	3%
Submitted works	
Universitas Sebelas Maret on 2021-12-02	3%
Submitted works	
research-repository.griffith.edu.au	3%
Internet	
Lydia Anggraini, Kalimi. "Welding Shape Control of Cross Member Backbone ...	3%
Crossref	

Universitas Islam Indonesia on 2022-07-21	3%
Submitted works	
Padjadjaran University on 2022-04-22	3%
Submitted works	
Universitas Sebelas Maret on 2021-12-02	3%
Submitted works	
Padjadjaran University on 2022-04-25	3%
Submitted works	
Padjadjaran University on 2022-04-25	3%
Submitted works	
Padjadjaran University on 2022-04-22	3%
Submitted works	
sinta3.ristekdikti.go.id	3%
Internet	
Yulia Sukmawardani, Ihsanawati, Buchari Buchari. "Optimization of Pyrrole El...	3%
Crossref	
Lukman Hakim Budi, Subawi Handoko. "Atmospheric Corrosion to Steel Pile o...	3%
Crossref	
patents.google.com	3%
Internet	
journal.uin-alauddin.ac.id	3%
Internet	
fisika.fmipa.unmul.ac.id	3%
Internet	

mdpi.com	3%
Internet	
E. H. Sujiono, A.C. M. Said, M. Y. Dahlan, R. A. Imran, S. Samnur. " Influence of...	3%
Crossref	
solacolu.chim.upb.ro	3%
Internet	
Eko Hadi Sujiono, Awalia Husnul Khatimah, Aisyah Nur Hasanah, Nurul Fitriya...	2%
Crossref	
repositsc.nuczu.edu.ua	2%
Internet	
R. Rusli, Abdul Rahman, Helmi Abdullah. "Student perception data on online le...	2%
Crossref	
E.H. Sujiono, D. Zabrian, Zurnansyah, Mulyati, V. Zharvan, Samnur, N.A. Hum...	2%
Crossref	
science.gov	2%
Internet	
essuir.sumdu.edu.ua	2%
Internet	
Eko Hadi Sujiono, Vicran Zharvan, Muhammad Yusriadi Dahlan, Andi Chaerun...	2%
Crossref	
dspace.uc.ac.id	2%
Internet	
thieme-connect.com	1%
Internet	

E.H. Sujiono, Zurnansyah, D. Zabrian, M.Y. Dahlan, B.D. Amin, Samnur, J. Agu... 1%

Crossref

Yasser Abd Djawad, Sutarsi Suhaeb, Ridwansyah, Hendra Jaya, Fathahillah, ... <1%

Crossref

Y.A. Djawad, S. Suhaeb, Ridwansyah, H. Jaya, Fathahillah, Saharuddin. "Deve... <1%

Crossref

Y.A. Djawad, S. Suhaeb, Ridwansyah, H. Jaya, Fathahillah, Saharuddin. "Deve... <1%

Crossref

E. H. Sujiono, H. Husain, M. Mulyadi, S. Samnur, M. Arsyad. "Deformation Patt... <1%

Crossref

University of Surrey on 2015-04-29 <1%

Submitted works

Sulhadi, Susanto, Aan Priyanto, Alif Fuadah, Mahardika Prasetya Aji. "Perfor... <1%

Crossref

Nasaruddin Salam, Amiruddin Haddade, David L. Clements, Moh. Ivan Azis. "A... <1%

Crossref

Mahardika Prasetya Aji, Pradita Ajeng Wiguna, Jotti Karunawan, Annisa Lidia ... <1%

Crossref

University of North Texas on 2008-12-06 <1%

Submitted works

Seoul National University on 2018-12-07 <1%

Submitted works