

PAPER NAME

**DOC-20230514-WA0028\_pdf**

WORD COUNT

**3194 Words**

CHARACTER COUNT

**15849 Characters**

PAGE COUNT

**4 Pages**

FILE SIZE

**239.2KB**

SUBMISSION DATE

**May 15, 2023 9:19 AM GMT+8**

REPORT DATE

**May 15, 2023 9:19 AM GMT+8**

### ● 10% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 9% Internet database
- Crossref database
- 6% Submitted Works database
- 4% Publications database
- Crossref Posted Content database

### ● Excluded from Similarity Report

- Bibliographic material
- Cited material
- Manually excluded sources
- Quoted material
- Small Matches (Less than 10 words)
- Manually excluded text blocks

# The Differences in SMAW Welding Toughness Using V Seams on SS400 Steel with Notch Variations

Badaruddin Anwar<sup>1</sup>, Samnur<sup>2</sup>, M. Sapril<sup>3</sup>

<sup>1</sup>Department Mechanical Engineering Vocation, Makassar State University, Makassar, South Sulawesi, Indonesia  
E-mail: badaruddin.anwar@unm.ac.id

**Abstract**—<sup>4</sup> This study aims to determine the difference in the magnitude of the impact toughness values of SMAW welding with V seams on SS400 steel with various notches. The results showed that the highest impact value was obtained from the U seam specimen with a value of 2.53 joules/mm<sup>2</sup>, and the lowest impact value was obtained from the V seam specimen with a value of 1.43 joules/mm<sup>2</sup>. The average value of the SS400 steel specimen is 1.96 joules/mm<sup>2</sup>. The significance value of the data that has been processed in SPSS is 0.255. This data has a value greater than 0.05. SS400 steel has a toughness value of 1.96 joules/mm<sup>2</sup> and has no significant difference between the notch shapes.

**Keywords**— Welding, SMAW, SS400 Steel, Notches.

## I. INTRODUCTION

Welding is a technique for joining two metals by melting some of the base metal and filler metal with or without added materials. One of the most popular welding techniques is shielded metal arc welding (SMAW) or in Indonesian protected electric arc welding. SMAW is a welding process in which heat is generated from an electric arc between the tip of the electrode and the metal being welded (Purba. Z, 2022). In welding, there are so many things that must be considered in doing it so that the results can be maximized.

Planning the construction of a frame or machine for welding joints, is efficient and safe, so that every type of welding work begins by developing good procedures. The specification of the welding procedure contains matters such as the welding process and type of welding, joint design, base material, filler metal, welding position, shielding gas, welding current, and seam type selection. One of the things that must be considered in welding is the selection of the seam. One of them is seam V. Seam V is a type of seam that is used by providing a gap in the metal to be joined at an angle of 60-80 degrees (Gunawan, 2019).

Proving the strength of an object or connection in welding certainly requires a test. this study uses a testing technique that is considered appropriate to test the strength of a connection, namely the impact test. (Anwar. B, 2022)

An impact test is one of the methods used to determine the strength, hardness, and ductility of a material. Impact testing is a test that measures the resistance of materials to shock loads.

This is what distinguishes impact testing from tensile and hardness testing where the loading is carried out slowly, while the impact test is carried out by shock. The basic principle of impact testing is the absorption of potential energy from the loading pendulum swinging from a certain height and striking the test load; so that the test load experiences maximum deformation resulting in fracture. (Lakshminarayanan, A.K, 2009).

SS400 steel is a type of low-carbon steel and is often used as a material in ship construction (Arif. N, 2022). In its application the steel must have good toughness; because according to its function, it must be able to withstand impacts.

Collisions or collisions with objects that are on the edge of the land such as piers and breakwaters, so that the toughness of the SS400 steel that is applied must be known through an impact test. The notches will affect the results of the impact test. So that in impact testing it is necessary to pay attention to the type of notch.

## II. RESEARCH METHOD

This experimental research uses SS400 steel as a specimen material. The electrode used is E 7018 with a diameter of 3.2 mm. The electrodes were chosen based on the results of research conducted by Arif, N. in 2022. The results of his research showed that the E 7018 type electrode had a tensile strength of 46.73 Kgf/mm<sup>2</sup>. In addition, SS400 steel has a tensile strength ranging from 400 to 560 Mpa which when converted to psi units gets a value between 58015.1 to 81221.1 and the E7018 electrode has a tensile strength of 7000 psi. The welding machine used is a SMAW welding machine with a current of 100A. Then an impact test was carried out on the specimen.

## III. RESULT AND DISCUSSION

TABLE 1. Impact Test Result Data

No.	Notch Type	Specimen	A (mm <sup>2</sup> )	E (Joule)
1	V Notch	1	80	127,5
		2	80	140
		3	80	115
2	U Notch	1	80	180
		2	80	202,5
		3	80	145
3	Rectangle Notch	1	80	117,5
		2	80	197,5
		3	80	137,5

<sup>10</sup> Based on the table above, it can be calculated to find the impact value with the following Equation:

$$HI = E/A \tag{1}$$

Therefore:

- HI : Impact Value (Joule/mm<sup>2</sup>)
- E : Impact Energy (Joule)
- A : Cross-Sectional Area (mm<sup>2</sup>)

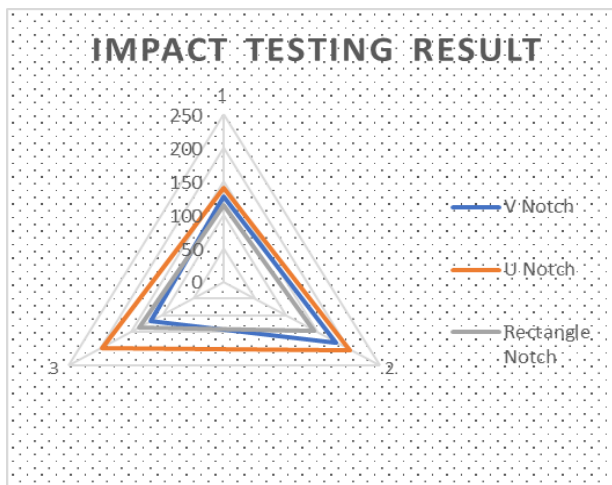


Fig. 1. Figure Impact Energy Testing Result

TABLE 2. Impact Value Testing Result

No.	Notch Type	Specimen	A (mm <sup>2</sup> )	E (Joule)	HI (Joule/mm <sup>2</sup> )	Average HI
1.	V Notch	1	80	127,5	1,59	1,59
		2	80	140	1,75	
		3	80	115	1,43	
2.	U Notch	1	80	180	2,25	2,19
		2	80	202,5	2,53	
		3	80	145	1,81	
3.	Rectangle Notch	1	80	177,5	2,21	2,12
		2	80	197,5	2,46	
		3	80	137,5	1,75	

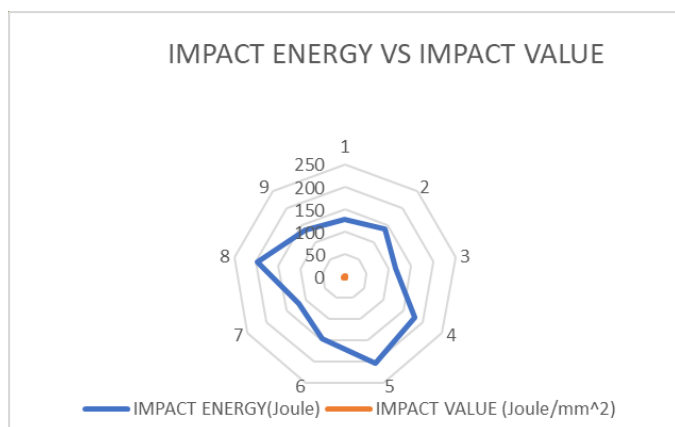


Fig. 2. Correlation between impact energy with impact value

Based on the research results, it can be said that the impact of toughness fluctuates. Based on these data, it can be seen that the highest impact value is in the second specimen using a U notch (2.53 joules/mm<sup>2</sup>). While the lowest value is shown in the first specimen using the V notch (1.43 joules/mm<sup>2</sup>).

The average value of the data presented is that for the U notch, it is 2.19 joules/mm<sup>2</sup>. The value of the V notch is 1.59 joules/mm<sup>2</sup>, while for the square notch, it is 2.12 joules/mm<sup>2</sup>. The data shows that the highest impact value is the specimen using a U-shaped notch. Meanwhile, the lowest impact value is the specimen using a V-notch. The average impact value of all types of notches is 1.96 joules/mm<sup>2</sup>.

The parameters contained in the table are used to calculate the average value of the data from each group of test

materials. Data analysis used in this study was the ANOVA test to determine whether there was a significant difference between SMAW welding using V notch, U notch, and square notch. Before carrying out the ANOVA test, an analysis requirement test was first carried out, namely the data normality test and the homogeneity test.

After carrying out the prerequisite test, proceed to the ANOVA test. If the sig value > 0.05 then H<sub>0</sub> is accepted and H<sub>1</sub> is rejected. If the sig value < 0.05 then H<sub>0</sub> is rejected and H<sub>1</sub> is accepted. The ANOVA test aims to determine whether there is a difference in a variable. Data analysis using the SPSS data application can be seen in the table below:

TABLE 3. Anova Analysis

	Sum of Squares	df	Mean Square	F	Sig.
Between Groups	0.553	2	0.276	1.936	0.225
Within Groups	0.856	6	0.143		
Total	1.409	8			

Based on Table 3, if the sig value > 0.05 then H<sub>0</sub> is accepted and H<sub>1</sub> is rejected. If the sig value < 0.05 then H<sub>0</sub> is rejected and H<sub>1</sub> is accepted, because the significance value is greater than 0.05. It can be concluded that there is no significant difference.

Based on the results of the study, it can be said that the impact toughness has no data differences. This can be proven through the ANOVA test described above. Where the significance value of the calculation is 0.225. With a significance level greater than 0.05, there is no significant difference. Even though the results of the ANOVA analysis showed no difference, the table observed showed that the U notch value has a larger value than the V notch and square.

The results show that the U notch is 2.19 joules/mm<sup>2</sup>. The value of the V notch is 1.59 joules/mm<sup>2</sup>, while for a square notch that is 2.12 joules/mm<sup>2</sup>. The data shows that the highest impact value is the specimen using a U-shaped notch. Meanwhile, the lowest impact value is the specimen using a V-notch. The average impact value of all types of notches is 1.96 joules/mm<sup>2</sup>.

The difference in value generated by the shape of the notch is influenced by the stress distribution that occurs. The distribution of notch pressure will affect the impact value (Ramakrishnan, A., 2021). The V-shaped notch has a point where the stress distribution is only concentrated at one point, namely the end of the notch. In the U notch, the stress distribution is spread out on each side of the notch. The square notch has two corner points. So that the stress distribution is spread over the two points. The results of the study show that the impact value of the U notch has the greatest value and the V notch has the smallest value. The V notch has one distribution point at the end of the notch, the U notch is distributed on each side, and the square notch has two distribution points at its corners. This difference in shape makes the value of the notch the U larger than the V notch.

Research conducted by Jalil in 2017 showed that there was a large influence on the impact value of welding that had

different currents. In this study, researchers used notch V. The research conducted by Jalil did not observe the value of the shape of the notch but observed the value based on the difference in the welding current used. However, the value of the V notch shown in this study has relatively the same relative value in this study which also uses a V notch and a current of 100A. the magnitude of the impact value shown in the 2017 Jalil study used a V notch, and a current of 100 which was 1.25, and in this study it was 1.59.

#### IV. CONCLUSION

Based on the results and discussion that has been described, it can be concluded that the large difference in the toughness value of SMAW welding on SS400 steel with notch variations is that there is no significant difference in toughness with a significance level of 0.05, but the highest value is in the second specimen in the model notch U and the lowest value is on the second specimen using the V notch.

#### REFERENCES

- [1] Anwar, B., & Adam, A. (2022). Analysis of the Toughness of the Vertical Position GMAW Welding on Steel ST 42 with Electrode Spiral Movement Pattern. *The International Journal of Science & Technology*, 10(6).
- [2] Arifin, A. (2020). Dissimilar metal welding using shielded metal arc welding: a review. *Technology reports of Kansai University*, 62(04).
- [3] Arif, N., Pranatal, E., Wardhani, I. P., & Harsi, R. B. (2022). The Effect of Root Gap on Bending Test Using FCAW Welding on SS400 Steel Materials At 3G Position. *Journal of Applied Sciences, Management, and Engineering Technology*, 3(2), 42-50.
- [4] Bansal, A., Vasudev, H., Sharma, A. K., & Kumar, P. (2019). Investigation on the effect of post-weld heat treatment on microwave joining of the Alloy-718 weldment. *Materials Research Express*, 6(8), 086554.
- [5] Barbosa, L. H. S., Modenesi, P. J., Godefroid, L. B., & Arias, A. R. (2019). Fatigue crack growth rates on the weld metal of high heat input submerged arc welding. *International Journal of Fatigue*, 119, 43-51.
- [6] Cioroagă, B. D., Linul, E., & Cioată, V. G. Effect of Welding Current Voltage on Tensile Strength of Pressure Vessel Steel Submerged Welded Joints.
- [7] Correia, A. N., Braga, D. F., Moreira, P. M., & Infante, V. (2021). Review on dissimilar structures joints failure. *Engineering Failure Analysis*, 129, 105652.
- [8] de Jesus Jorge, L., Cândido, V. S., da Silva, A. C. R., da Costa Garcia Filho, F., Pereira, A. C., da Luz, F. S., & Monteiro, S. N. (2018). Mechanical properties and microstructure of SMAW welded and thermally treated HSLA-80 steel. *Journal of materials research and technology*, 7(4), 598-605.
- [9] Gunawan, E., Choifin, M., Rosidin, M. K., Afifah, Y. N., Lestariningsih, W., Pradana, M. S., ... & Makki, A. (2019, March). Analysis of the Effect of Current Flow Variations in GTAW on SS 400 Plate Material Connected with SUS 304 Stainless Steel Plate Against Tensile Strength and Hardness with ER308L Electrodes. In *Journal of Physics: Conference Series* (Vol. 1175, No. 1, p. 012277). IOP Publishing. Pendingin Air Laut dan Oli. *Jurnal Teknik Perkapalan*, 5(4), 585-593.
- [9] Haupt, W., Riffel, K. C., Israel, C. L., Silva, R. H. G., & Reguly, A. (2018). Effect of wire electrode and shielding gas compositions on the mechanical properties of DOMEX 700 steel welded by the GMAW-P process. *Journal of the Brazilian Society of Mechanical Sciences and Engineering*, 40, 1-11.
- [10] Jahanzeb, N., Shin, J. H., Singh, J., Heo, Y. U., & Choi, S. H. (2017). Effect of microstructure on the hardness heterogeneity of dissimilar metal joints between 316L stainless steel and SS400 steel. *Materials Science and Engineering: A*, 700, 338-350.
- [11] Jalil, S. A., Zulkifli, Z., & Rahayu, T. (2017). Analisa kekuatan impak pada penyambungan pengelasan smaw material ASSAB 705 dengan variasi arus pengelasan. *Jurnal Polimesin*, 15(2), 58-63.
- [12] Kimapong, K., & Watanabe, T. (2005). Lap joint of A5083 aluminum alloy and SS400 steel by
- [13] Lakshminarayanan, A. K., Shanmugam, K., & Balasubramanian, V. (2009). Effect of welding processes on tensile, impact, hardness and microstructure of joints made of AISI 409M FSS base metal and AISI 308L ASS filler metals. *Ironmaking & Steelmaking*, 36(1), 75-80.
- [14] Lee, Y. H., Ji, W. J., & Kwon, D. (2004). Stress measurement of SS400 steel beam using the continuous indentation technique. *Experimental Mechanics*, 44, 55-61
- [15] Ling, K. H., Fuh, Y. K., Wu, K. L., Kuo, T. C., & Huang, C. Y. (2015). Groove configurations of a flux-cored arc welding process used in critical structures of precision mechanical presses—mechanical and metallurgical studies. *The International Journal of Advanced Manufacturing Technology*, 78, 1905-1916.
- [16] Ling, K. H., Fuh, Y. K., Kuo, T. C., & Xun-Tu, S. (2015). Effect of welding sequence of a multi-pass temper bead in gas-shielded flux-cored arc welding process: hardness, microstructure, and impact toughness analysis. *The International Journal of Advanced Manufacturing Technology*, 81, 1033-1046.
- [17] Méndeza, M. Á. H., Jacoboa, R. G., & Veraa, M. Á. Temperature decreasing influence on impact toughness in laser beam welded joints in HSLA steels.
- [18] Miki, C., Homma, K., & Tominaga, T. (2002). High-strength and high-performance steels and their use in bridge structures. *Journal of constructional steel research*, 58(1), 3-20.
- [19] Moi, S. C., Pal, P. K., Bandyopadhyay, A., & Rudrapati, R. (2018). Determination of tungsten inert gas welding input parameters to attain maximum tensile strength of 316L austenitic stainless steel. *Strojnický časopis-Journal of Mechanical Engineering*, 68(3), 231-248.
- [20] Park, H. M. (2009). Comparing group means; t-tests and one-way ANOVA using Stata, SAS, R, and SPSS.
- [21] Peng, Y., Wu, C., Gan, J., & Dong, J. (2018). Determination of the local constitutive properties of the welded steel joints using digital image correlation method. *Construction and Building Materials*, 171, 485-492.
- [22] Pratikno, H., Samiyono, A. N., & Dhanistha, W. L. (2020). Analyzing the Effect of Variation in Shielding Gas Flow Rate and V Groove Type Towards Tensile and Metallographic Testing of GMAW Weld Joint of ASTM A53 and A36. *International Journal of Offshore and Coastal Engineering (IJOCE)*, 4(1), 35-41.
- [23] Purba, Z., Bahri, S., & Syarif, J. (2022). The effect of weld groove variations on the toughness of welding joints of AISI 1050 material. *Journal of Welding Technology*, 4(1), 27-33.
- [24] Qazi, M. I., Akhtar, R., Abas, M., Khalid, Q. S., Babar, A. R., & Pruncu, C. I. (2020). An integrated approach of GRA coupled with principal component analysis for multi-optimization of shielded metal arc welding (SMAW) process. *Materials*, 13(16), 3457.
- [25] Rahangmetan, K. A., Wullur, C. W., & Sariman, F. (2020, July). Effect Variations and Types of Smaw Welding Electrodes on A36 Steel to Tensile Test. In *Journal of Physics: Conference Series* (Vol. 1569, No. 3, p. 032052). IOP Publishing.
- [26] Ramakrishnan, A., Rameshkumar, T., Rajamurugan, G., Sundararaju, G., & Selvamuthukumar, D. (2021). Experimental investigation on mechanical properties of TIG welded dissimilar AISI 304 and AISI 316 stainless steel using 308 filler-rod. *Materials Today: Proceedings*, 45, 8207-8211.
- [27] Slimane, A., Bouchouicha, B., Benguediab, M., & Slimane, S. A. (2015). Contribution to the study of fatigue and rupture of welded structures in carbon steel-a48 ap: experimental and numerical study. *Transactions of the Indian Institute of Metals*, 68, 465-477.
- [28] Temmar, M., Hadji, M., & Sahraoui, T. (2011). Effect of post-weld aging treatment on mechanical properties of Tungsten Inert Gas welded low thickness 7075 aluminium alloy joints. *Materials & Design*, 32(6), 3532-3536.
- [29] Turan, E., Koçal, T., & Ünlügençoğlu, K. (2011). Welding Technologies in Shipbuilding Industry. *Tojsat*, 1(4), 24-30.
- [30] Uygun, A. V., Durmuş, A., Bayram, A., & Ülkü, S. (2005). An examination of the mechanical properties of dissimilar steel welds. *Materials Testing*, 47(6), 324-330.
- [31] Wang, X., Wang, J., Gao, Z., Xia, D. H., & Hu, W. (2019). Tempering effects on the microstructure and properties of submerged arc surfacing layers of H13 steel. *Journal of Materials Processing Technology*, 269, 26-34.

- [32] Wibowo, I. A., Suharno, S., & Widiastuti, I. The Effect of Variation of Electric Current on Micro Structure and Hardness in Ss400 Steel Welding Process Using the Smaw Method. *Journal of Mechanical Engineering and Vocational Education (JoMEVE)*, 1(2), 81-86.
- [33] Yan, R., Wang, J., & Zheng, W. G. (2013). Application and Development of Ship Welding Material. In *Advanced Materials Research* (Vol. 774, pp. 1426-1429). Trans Tech Publications Ltd.
- [34] Yasinta, S., Triyono, Muhayat, N., & Saputro, Y. C. N. (2020, April). Effect of water depth and water flow on the physics and mechanic properties of the underwater wet welded low carbon steel with post-weld heat treatment. In *AIP Conference Proceedings* (Vol. 2217, No. 1, p. 030093). AIP Publishing LLC.
- [35] Yockey, R. D. (2017). *SPSS® Demystified: A Simple Guide and Reference*. Routledge.
- [36] Yohanes, P., Muhayat, N., & Triyono, T. (2018). Effect of water depth on the microstructure and mechanical properties of SS400 steel in underwater welding. *Key Engineering Materials*, 772, 128-132.
- [37] Yu, W. X., Liu, B. X., Chen, C. X., Liu, M. Y., Zhang, X., Fang, W., ... & Yin, F. X. (2020). Microstructure and mechanical properties of stainless-steel clad plate welding joints by different welding processes. *Science and Technology of Welding and Joining*, 25(7), 571-580.

● **10% Overall Similarity**

Top sources found in the following databases:

- 9% Internet database
- Crossref database
- 6% Submitted Works database
- 4% Publications database
- Crossref Posted Content database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	<b>download.atlantis-press.com</b> Internet	2%
2	<b>jurnal.unma.ac.id</b> Internet	2%
3	<b>Farid Sariman, Christian Wely Wullur, Cipto, Daniel Parenden. "Analysi...</b> Crossref	1%
4	<b>researchgate.net</b> Internet	1%
5	<b>pdxscholar.library.pdx.edu</b> Internet	<1%
6	<b>Irlidiya Irlidiya, Achmad Tolla, Nurdin Noni, Anshari Anshari. "The Devel...</b> Crossref	<1%
7	<b>teknomekanik.ppj.unp.ac.id</b> Internet	<1%
8	<b>University Of Tasmania on 2021-09-17</b> Submitted works	<1%



9

**link.springer.com**

Internet

&lt;1%

10

**media.neliti.com**

Internet

&lt;1%

## ● Excluded from Similarity Report

- Bibliographic material
- Cited material
- Manually excluded sources
- Quoted material
- Small Matches (Less than 10 words)
- Manually excluded text blocks

---

### EXCLUDED SOURCES

**ijses.com**

Internet

**80%**

### EXCLUDED TEXT BLOCKS

**International Journal of Scientific Engineering and Science** ISSN (Online): 2456-7361

Universitas Brawijaya on 2023-02-10